



| REV. | ECN.NO.     | APPD.       |
|------|-------------|-------------|
| A    | EXXXXXXXXXX | yangguifeng |

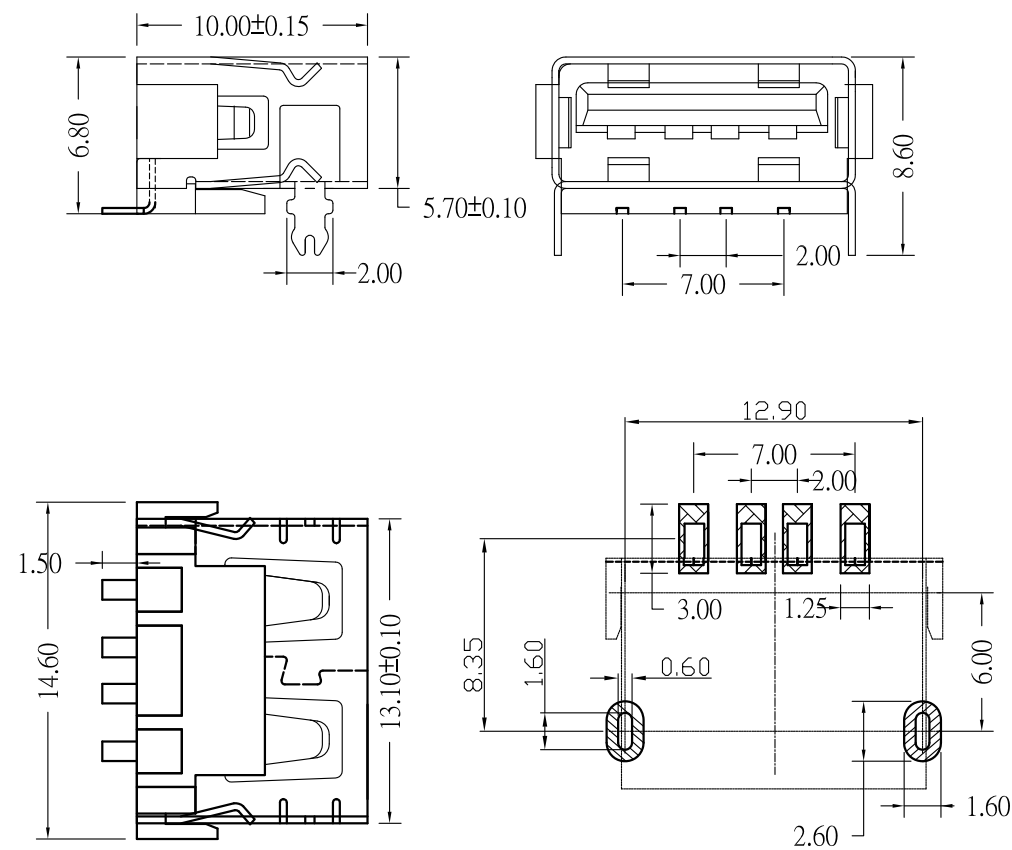

RECOMMENDED P. C. B LAYOUT

- NOTES:
- MATERIAL:
    - Housing:thermoplastic plastics
    - terminals:Copper Alloy  
Gold plated in contact area:  
Tin plated in termination  
Nickel Plated overall
    - Shell:Steel&Copper Alloy  
Nickel Plated overall
  - ELECTRICAL CHARACTERISTICS:
    - Rating Current :1.5 Ampere
    - Rating Voltage :30 V Max
    - Contact Resistance:30 Milli ohms
    - Insulation Resistance:1000 Mega ohms Min.
  - MECHANICAL CHARACTERISTICS:
    - Connector Mating force: 35N MAX(3.57Kgf)
    - Connector Unmating force:10N min(1.02Kgf)
    - Durability:1500Cycles.
  - ENVIRONMENT CHARACTERISTICS:
    - Operating temperature:-0°C to +50°C
    - Storage temperature:-20°C to +60°C

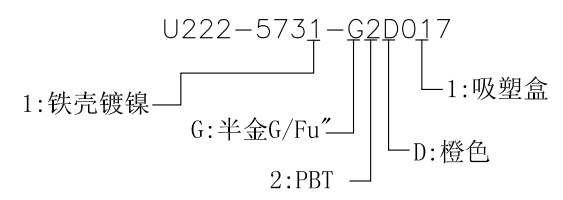

|                                      |             |   |                  |       |        |
|--------------------------------------|-------------|---|------------------|-------|--------|
| TOLERANCE UNLESS OTHERWISE SPECIFIED |             | <b>FLW</b> 深圳市华联威电子科技有限公司<br>HUA LIAN WEI TECHNOLOGY ELECTRONICS CO.;LTD. |                  |       |        |
| .XXX ±0.10                           | .X' ±3'     |   |                  |       |        |
| APPROVED                             |             | PART NAME:  | AF 10.0短体 高度6.8  |       |        |
| CHECKED                              |             | PART No:  | U222-5731-G2D017 | C     |        |
| DRAWN                                | yangguifeng | PROJECTION:   | UNIT:            | SCALE | SHEET  |
| DATE                                 | 2021.12.01  |   | mm               | 1:1   | 1 OF 1 |
|                                      |             |   |                  |       | REV. A |