

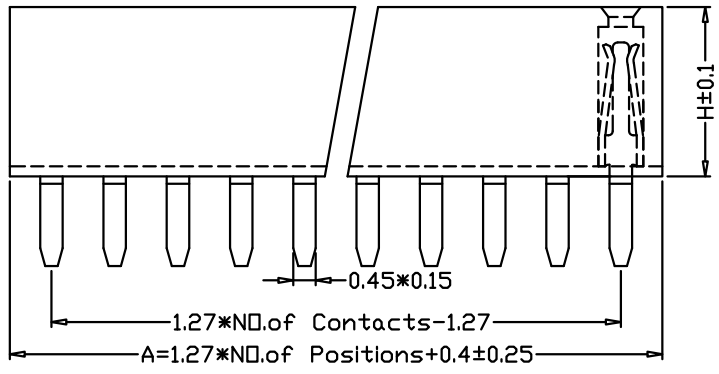


REV.	ECN.NO.	APPD.
A	/	ZFY

技术指标 (Technical Index) :

1. 工作温度 (Temperature range) : -25° C-85° C.
2. 额定电压 (Rated voltage) : 250V DC/AC (rms)
3. 额定电流 (Rated current) : 5A AC, DC
4. 接触阻抗 (CONTACT Resistance) : $\leq 25M\Omega$
5. 耐压值 (Withstanding voltage) : 1500V AC/minute
6. 绝缘阻抗 (Insulation resistance) $\geq 1000M\Omega$

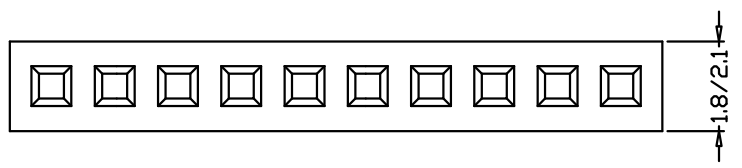

216104-1119-G31018

G: 镀半金G/Fu"
 1: 盘装
 1: 黑色
 3: PA6T



P. C. B LAYOUT

A	H			PC	PA
2P-40P	1.5	2.0		1.5~3.0	2.0~10.0

TOLERANCE UNLESS OTHERWISE SPECIFIED		FLW 深圳市华联威电子科技有限公司			
.xxx ±0.15	.xx ±0.20	.x ±0.30	HUA LIAN WEI TECHNOLOGY ELECTRONICS CO;LTD.		
		.x' ±5°			
		.xx' ±2°			
APPROVED		PART NAME:	1.27间距 排母单排直插7PIN		
CHECKED		PART No:	216104-1119-G31018		C
DRAWN	ZhangFenYan	PROJECTION:	UNIT:	SCALE	SHEET
DATE	2018.10.10		mm	1:1	10F1
					REV. A