
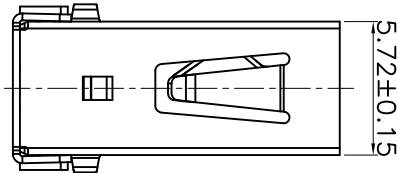
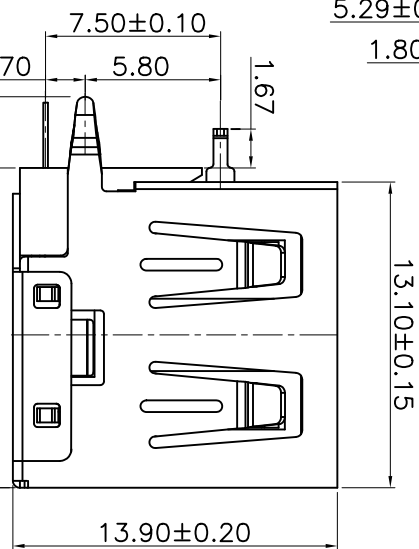
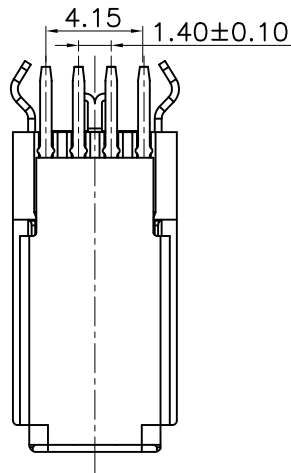


REV.	ECN NO.	APPD.
A	/	pcy

规格说明: Specifications:
电气特性: Electrical:

1. 额定电流: Current Rating
1.5A/contact terminal
2. 额定电压: Voltage Rating
30V DC
3. 接触电阻: Contact Resistance
30 milliohms MAX
4. 耐电压: Dielectric Withstanding Voltage:
500 V AC AT Sea Level
5. 绝缘电阻: Insulation Resistance:
1000MEGA ohms MIN

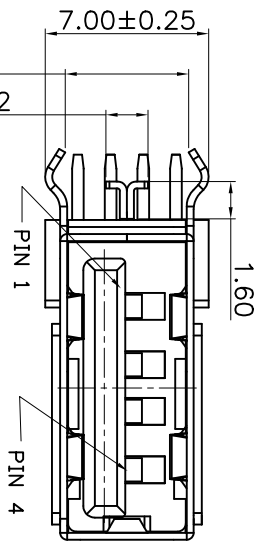

- 物理性能: Mechanical:
1. 插拔力: Connector Mate and Unmate Force
Mate force: 3.57kgf(MAX)
Unmate force: 1.02kgf(MIN)
2. 端子保持力: Terminal Retention
1.0kgf(MIN)
- 原材料: Material:


Hing Temperature Thermoplastics,

2. 端子: Contact: Copper Alloy C2680
3. 外壳: Shell: Copper Alloy C2680/SPCC

电镀: Finish:
1. 端子: Contact: Plated Gold in Mating Area;
Tin On Solder Talls

端子四周镀50U"(MIN)镍,镀金区域镀100-200U"镀金1U"
2. 外壳: Shell:
镍壳四周镀80U"(MIN)镍

Nickel Plating

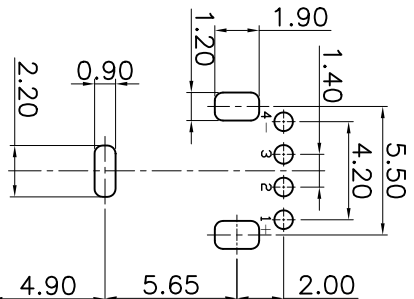

RECOMMEND PCB LAYOUT

- U226-112X-XXXXXX
- 1: Iron alloy Ni plating
 - 5: Copper alloy Ni plating
 - 1: Au 1u"
 - 3: Au 3u"
 - 5: Au 5u"
 - 7: Au 10u"
 - 8: Au 15u"
 - A: Au 30u"
 - 1: Black
 - 2: White
 - 3: Beige
 - 4: Pure White
 - 1: PA66
 - 2: PBT
 - 7: ROHS
 - 8: ROHS UL94V-0
 - 1: troy
 - 8: Tape&Reel

TOLERANCE UNLESS OTHERWISE SPECIFIED	OTHERWISE SPECIFIED		HUA LIAN WEI TECHNOLOGY ELECTRONICS CO.,LTD.
	.XXX ±0.10	.XX ±0.20	
APPROVED			HLW 深圳市华联威电子科技有限公司
CHECKED			HUA LIAN WEI TECHNOLOGY ELECTRONICS CO.,LTD.
DRAWN	pengchaoyong		PART No: U226-112X-XXXXXX
DATE	2015.01.21		UNIT: mm
			SCALE 1:1
			SHEET 10F1
			REV. A