
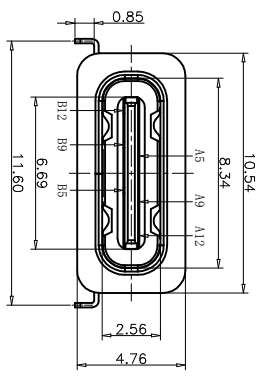

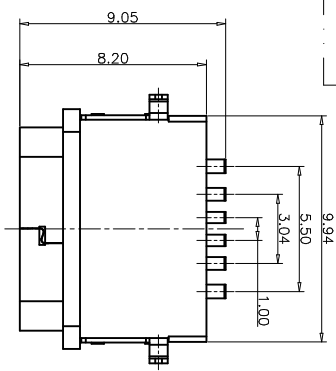


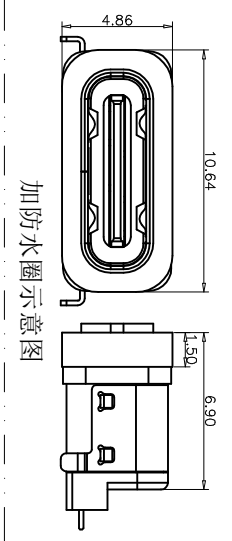
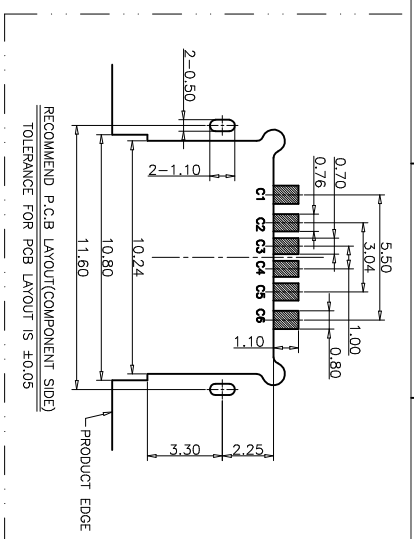


REV.	ECN.NO.	APPD.
A	/	ZFY

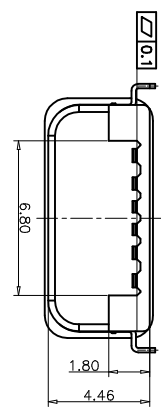

- U573-541X-XXXXX8**
- 1: 铁壳镀镍
  - 5: 铜壳镀镍
  - B: 不锈钢镀镍
  - 1: 半金1u"
  - 3: 半金3u"
  - G: 镀半金G/Fu"
  - 1: 盘装
  - 1: 黑色
  - 2: 白色
  - 3: 载带
  - 1: 黑色
  - 1: 白色
  - 1: PA46
  - 2: PBT
  - 6: LCP

TABLE:

NO	PART	QTY	Material
1	SHELL	1	STAINLESS STEEL,IN PLATED
2	CONTACT	6	COPPER STEEL,TIN/AU/NI PLATED
3	MID PLATE	1	STAINLESS STEEL,NO PLATING
4	MID HOUSING	1	HIGH TEMPERATURE RESISTANT PLASTIC BLACK UL94 V-0
5	2ND HOUSING	1	HIGH TEMPERATURE RESISTANT PLASTIC BLACK UL94 V-0
6	SHIELDING PLATE	1	STAINLESS STEEL,IN PLATED

PIN ASSIGNMENT:

PIN NO	A1&B12	A4&B9	A5	B5	A9&B4	A12&B1
SIGNAL NAME	GND	VBUS	CCI	CC2	VBUS	GND
PCB PAD NO.	C1	C2	C3	C4	C5	C6

NOTES:  
SPECIFICATION:  
1.CURRENT RATING: 3.0A MAX  
2.VOLTAGE: 100 VAC  
3.TEMPERATURE RANGE: -30°C~+85°C  
4.CONTACT RESISTANCE: 40 MILLIONHM MAX  
5.INSULATION RESISTANCE: 100 MEGOHMS MIN  
6.INSERTION FORCE: 5N-20N  
7.UNMATING FORCE: 8N-20N  
8.DURABILITY: 10000 CYCLES  
9.WATER PROOFNESS: THIS PRODUCT IS BASED ON IPX7.

TOLERANCE UNLESS OTHERWISE SPECIFIED	XXX ±0.15 XX ±0.20 X ±0.30	X' ±5' XX' ±2'	<b>HLW</b> 深圳市华联威电子科技有限公司
APPROVED			HUA LIAN WEI TECHNOLOGY ELECTRONICS CO.,LTD.
CHECKED			PART NAME: USB TYPE C 6P沉板防水母座外壳两脚插板
DRAWN	ZhangFenYan		PART No: U573-541X-XXXXX8
DATE	2018.10.10		PROJECTION:
			UNIT: mm
			SCALE: 1:1
			SHEET: 10F1
			REV. A

A

B

C

D

E

F

A

B

C

D

E

F

9 8 7 6 5 4 3 2 1