
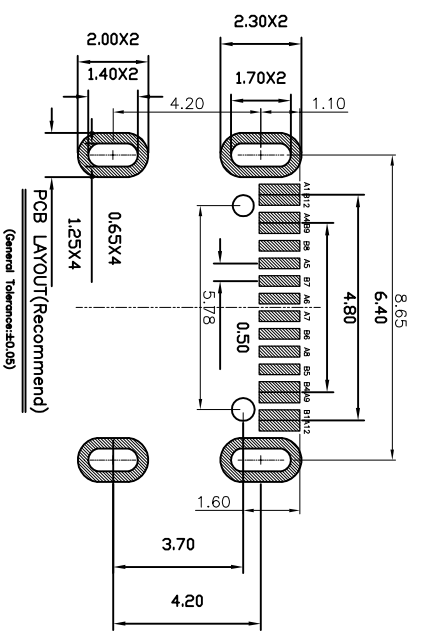
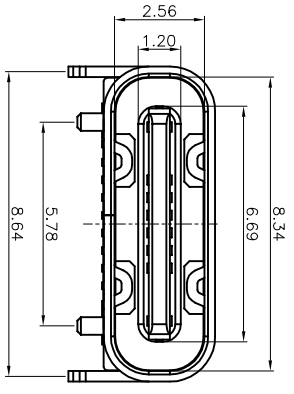
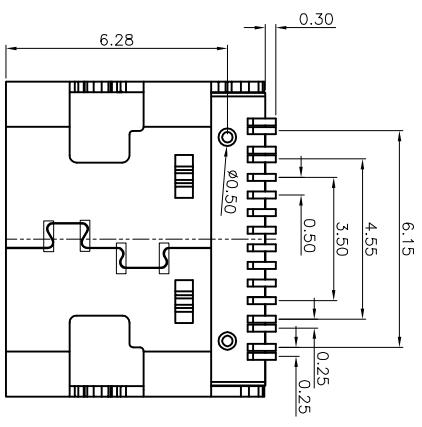

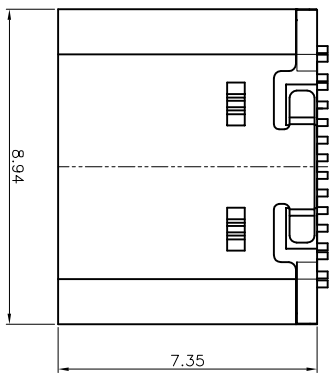


REV.	ECH. NO.	APPD.
A	/	/

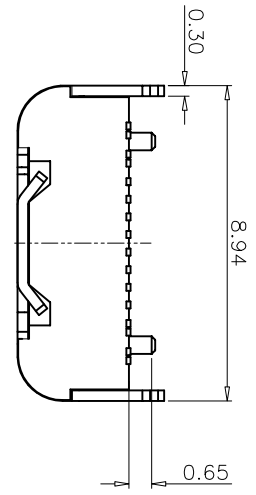

- NOTE:
- 1.MATERIAL SPECIFICATION: 1.HOUSING:HIGH TEMPERATURE RESISTANT PLASTIC:UL94 V-0
 - 2.CONTACTS: COPPER ALLOY
 - 3.INSULATION RESISTANCE: 100MΩ MIN
 - 4.FRONT SHIELD: STAINLESS STEEL
 - 5.ENVIRONMENTAL PERFORMANCE: 3-3.DURABILITY: 1000 CYCLES
 - 6.R. REFLOW TEMPERATURE: -25°C~+85°C
 7. ELECTRICAL PERFORMANCE: 1.VOLTAJE ENTREGA: 5V
 8. REFLOW TEMPERATURE ON THE BOARD SHALL BE MAINTAINED FOR 10 SECONDS AT 280°C

- U572-191X-XXX1X8
- 1: 铁壳镀镍
 - 5: 铜壳镀镍
 - B: 不锈钢
 - 1: 半金1u"
 - 3: 半金3u"
 - 5: 半金5u"
 - 8: 半金15u"
 - 9: 镀全金1u"
 - G: 半金G/Fu"

- 1: PA66
- 2: PBT
- 6: LCP
- 1: 吸塑盒
- 2: 吸塑管
- 3: 载带
- 6: 载带+贴麦拉
- 1: 黑色
- 2: 白色
- 3: 米黄色

PCB LAYOUT(Recommend)
(General Tolerance:±0.05)

PIN ASSIGNMENTS

PIN	SIGNAL NAME	PIN	SIGNAL NAME
AS	CC1	B12	GND
A9	VBUS	B9	VBUS
A12	GND	B5	CC2

TOLERANCE UNLESS OTHERWISE SPECIFIED	OTHERWISE SPECIFIED	DATE
XXX ±0.10 XX ±0.20 X ±0.30	X ±3 XX ±2	2021.11.06

APPROVED	CHECKED	DRAWN	DATE
		weihong	2021.11.06

HLW 深圳市华联威电子科技有限公司
HUA LIAN WEI TECHNOLOGY ELECTRONICS CO.,LTD.

PART NAME: TYPE C SMT 16PIN 插脚

PART NO: U572-191B-161138

PROJECTION: UNIT: mm SCALE: 1:1 SHEET: 10F1 REV. A

A B C D E F

9 8 7 6 5 4 3 2 1

A B C D E F

9 8 7 6 5 4 3 2 1