
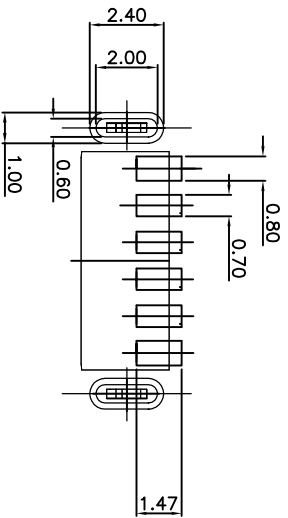


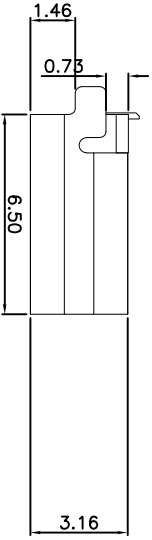



B12	GND
B9	VBUS
B5	CC2
A5	CC1
A9	VBUS
A12	GND
PIN	SIGNAL NAME

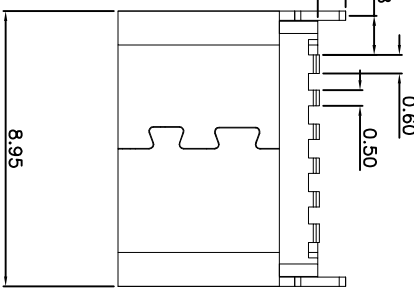

REV.	ECH. NO.	APPD.
A	EXXXXXXXXXXX	yongguifeng

NOTES:

- MATERIAL:
 - MOLDING: LCP UL94 V-0
 - CONTACT: COPPER ALLOY.
 - GOLD PLATED Min ON CONTACT AREA, 100u"
 - Min TIN (LEAD FREE) ON SOLDER AREA.
 - SHELL: COPPER ALLOY C2680,T=0.30±0.03mm
 - 50u" NICKEL PLATING OVER ALL.
- MECHANICAL:
 - INSERTION: 5~20N.
 - EXTRACTION: 8~20N AFTER TEST.
 - DURABILITY: 10000 CYCLES
- ELECTRICAL:
 - CURRENT: 3A FOR VBUS;
 - 1.25A FOR GND PIN.
 - 0.25A FOR OTHER
 - VOLTAGE: 20 V MAX
 - WITHSTANDING VOLTAGE: 100V AC R.M.S.
 - CONTACT RESISTANCE: 40mΩ MAX.
 - INSULATION RESISTANCE: 100MΩ MIN.
- ENVIRONMENTAL
 - TEMPERATURE RANGE -25°C ~ +85°C
- 尺寸标注事项:
 - 图示有标示⊗者为首样全检, 重点管控尺寸.
 - 产品符合RoHS标准

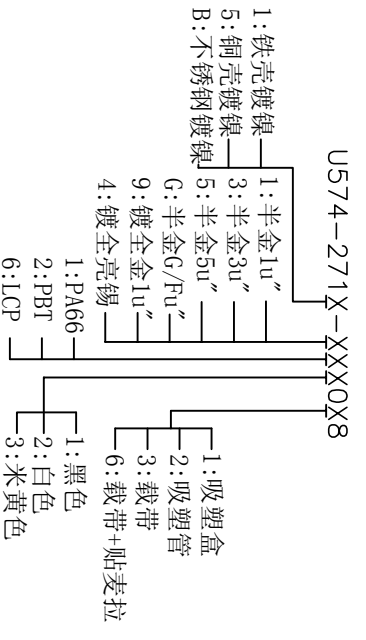

TOLERANCE UNLESS OTHERWISE SPECIFIED		HW 深圳市华联威电子科技有限公司	
XXX ±0.10	X' ±3'	HUA LIAN WEI TECHNOLOGY ELECTRONICS CO.,LTD.	
XX ±0.20	X' ±2'	PART NAME: TYPE C 6P 立贴6.5	
X ±0.30	X' ±2'	PART No: U574-271B-661038	
APPROVED		PROJECTION:	UNIT: mm
CHECKED		SCALE	SHEET 1 OF 1
DRAWN	yongguifeng	DATE	2021.12.01
DATE	2021.12.01		REV. C