

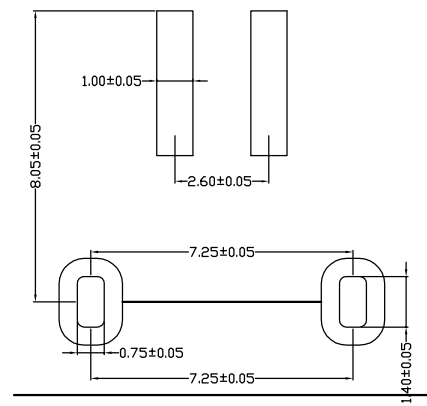

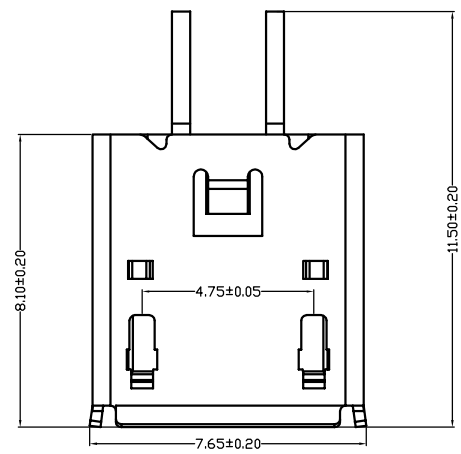


REV.	ECN.NO.	APPD.
AO	/	/

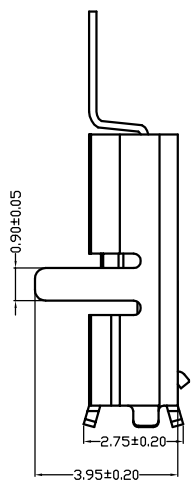


PCB LAYOUT

- 备注:
- 产品规格:
 - 插入力: 35N MAX.
 - 拔出力: 10N MIN. INITIAL 8-20N AFTER 1500 CYCLES
 - 额定电流: 1.0A
 - 额定电压: 30V
 - 耐久性: 1500 CYCLES MIN.
 - 耐电压: 100V AC MIN.
 - 接触阻抗: 30mΩ MAX. INITIAL: 40mΩ MAX AFTER 1500 CYCLES
 - 绝缘电阻: 100MΩ MIN
 - 工作温度: -30° TO +80°
 - 材质:
 - 胶芯: LCP UL94V-0
 - 端子: C2680R-H, 镍底, GOLD
 - 外壳: SPCCorSUS, 表面镀镍60-100 μ
 - 所用材质须符合RoHS要求
 - 重点尺寸标识"▲"符号

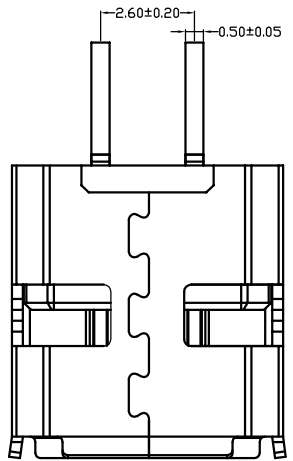

- U444-721X-XXX0X8
- 1: Iron alloy Ni plating
 - 5: Tinning of copper shell
 - A: stainless steel tin plating
 - B: stainless steel Ni plating
 - 1: Au 1u"
 - 8: Au 15u"
 - G: Au G/Fu"
 - 1: tray
 - 2: Tube
 - 3: Tape&Reel
 - 7: Pipe arrangement
 - 1: Black
 - 2: Cool grey
 - 5: PA9T
 - 2: PBT
 - 6: LCP
 - 9: Tape&Reel+Mylar



TOLERANCE UNLESS OTHERWISE SPECIFIED	
.XXX ±0.10	.X' ±3'
.XX ±0.20	.XX' ±2'
.X ±0.30	

FLW 深圳市华联威电子科技有限公司
HUA LIAN WEI TECHNOLOGY ELECTRONICS CO;LTD.

APPROVED		PART NAME:	MICRO USB 5P/F TYPE DIP 7.15				
CHECKED		PART No:	U444-721X-X61078				C
DRAWN	weihong	PROJECTION:	UNIT:	SCALE	SHEET	REV.	
DATE	2021.08.20		mm	1:1	10F1	AO	