


REV.	ECN.NO.	APPD.
AO	/	/

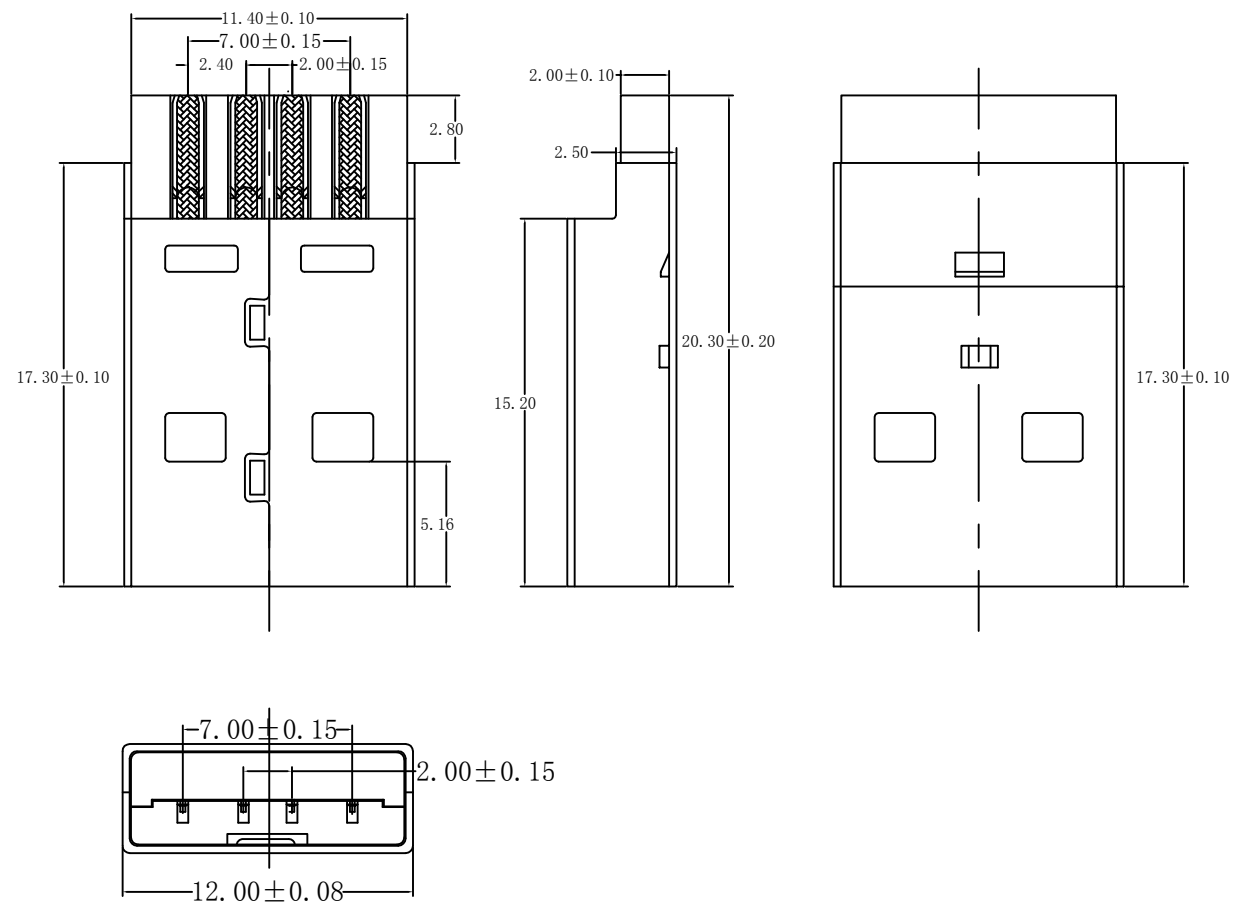

MECHANICAL
 Insulator material:
 PBT@glass-fibre reinforced
 UL 94v-0
 plastic:Brass
 NUt specifications:
 Shell:nicdel(or tin,gold)plated
 Number of cntact:04.
 Durabil tty:5000 cycles

ELECTRICAL
 Current rating:5Amp
 Dielectric withstanding voltage:AC
 500vmin(500v dc)
 500m max
 Contactresistance:
 25m max
 Working temperayure:-50° c- 150° c

U215-0541-XXXOX7

- G:半金G/F
- 1:半金1u"
- 3:半金3u"
- 5:半金5u"
- 8:半金15u"
- 9:镀全金1u"

- 1:吸塑盒
- 3:载带冷封
- 7:PE袋装
- 8:载带热封

- 1:PA66
- 2:PBT
- 6:LCP
- 1:黑色
- 2:白色
- E:蓝色300C-3
- 7:蓝色300C

- Notes:
- 产品外观不得有压伤，缩水，缺胶等不良。
毛边不大于0.05mm.
 - 产品组装后无不导通现象。
 - 产品材质. 端子:C2680, T=0.20mm
外壳:Spcc, T=0.30mm
胶芯: PPT
 - 电镀规格:端子镀半金锡1U' 外壳镀镍100U".24H

TOLERANCE UNLESS OTHERWISE SPECIFIED		FLW 深圳市华联威电子科技有限公司				
.XXX ±0.10 .XX ±0.20 .X ±0.30		.X' ±3' .XX' ±2'		HUA LIAN WEI TECHNOLOGY ELECTRONICS CO;LTD.		
APPROVED		PART NAME:	AM 短体焊线			
CHECKED		PART No:	U215-0541-G22077			C
DRAWN		PROJECTION:	UNIT:	SCALE:	SHEET:	REV.
DATE			mm	1:1	10F1	AO