


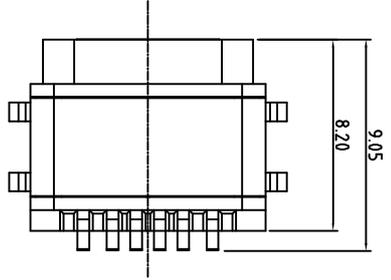

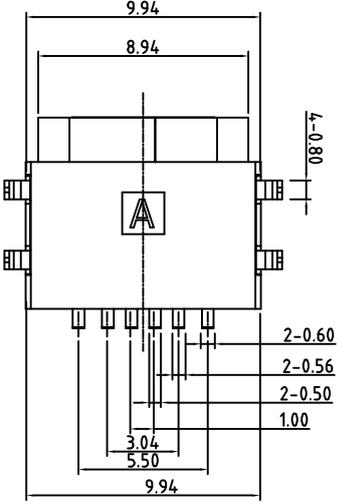
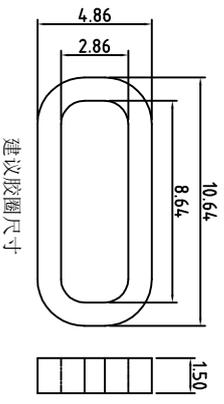
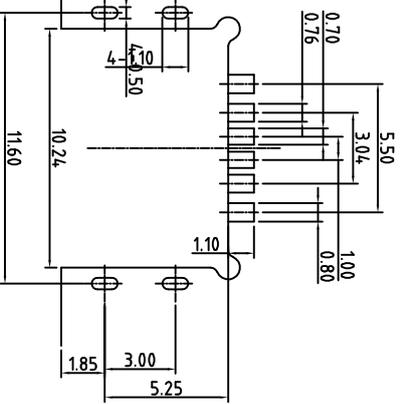
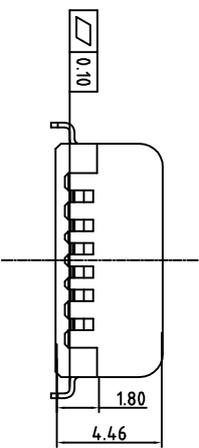


| REV. | ECN.NO. | APPD. |
|------|---------|-------|
| A | / | ZFY |



- SPECIFICATIONS:
- ELECTRICAL CHARACTERISTICS:
 - RATING: 5A;
 - CONTACT RESISTANCE: 30 mΩ MAX.(INITIAL);
 - DIELECTRIC WITHSTANDING: 100V AC MIN.;
 - INSULATION RESISTANCE: 100MΩ MIN.;
 - DURABILITY: 10,000 CYCLES MIN.;
 - INSERTION FORCE: 5-20N;
 - EXTRACTION FORCE: 6-20N;
 - WATER PROOFNESS: THIS PRODUCT IS BASED ON IPX6.
 - PLUG INTERFACE DIMENSIONS CONFORM TO USB2.0 SPEC.
 - PACKAGING: TAPE & REEL.

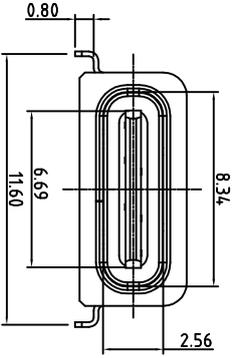

- U573-521X-XXXXX8
- 1: 铁壳镀镍
 - 5: 铜壳镀镍
 - B: 不锈钢镀镍
 - 1: 半金1u"
 - 3: 半金3u"
 - G: 镀半金G/Fu"
 - 1: 盘装
 - 3: 载带
 - 1: 黑色
 - 2: 白色
 - G: 绿色
 - 1: P446
 - 2: PBT
 - 6: LCP

| ITEM | PART NAME | Q'TY | FINISH | NOTE |
|------|-----------|------|--|------|
| 3 | Shell | 1 | SUS304R-1/2H Ni Plating=0.25mm | |
| 2 | Contact | 6 | Phosphor bronze C5191R-EH Au/Ni Plating =0.20um | |
| 1 | Housing | 1 | PA10T (G.F30%) | |

| A5 | CC1 | B12 | GND |
|-----|-------------|-----|-------------|
| A9 | VBUS | B9 | VBUS |
| A12 | GND | B5 | CC2 |
| PIN | SIGNAL NAME | PIN | SIGNAL NAME |

| | | | |
|--|-------------|----------------------------------|------------|
| TOLERANCE UNLESS OTHERWISE SPECIFIED | | HLW 深圳市华联威电子科技有限公司 | |
| XXX ±0.15 | XX ±0.20 | X ±0.30 | X' ±5' |
| HUA LIAN WEI TECHNOLOGY ELECTRONICS CO.,LTD. | | PART NAME: USB TYPE C 6P四脚沉板防水母座 | |
| APPROVED | CHECKED | DRAWN | DATE |
| | ZhangFenYan | 2018.10.10 | |
| PART No: U573-521X-XXXXX8 | | UNIT: mm | SCALE: 1:1 |
| PROJECTION: | | SHEET: 10F1 | REV. A |

9 8 7 6 5 4 3 2 1

A B C D E F