


REV.	ECN.NO.	APPD.
AO	/	/

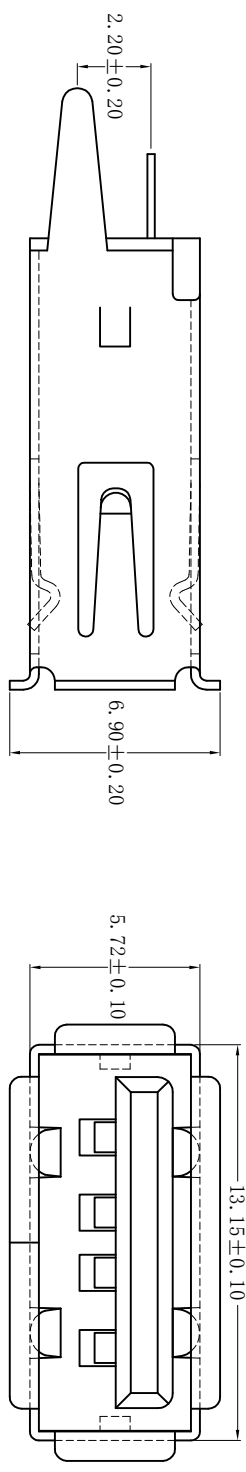



规格说明: Specifications:  
电气特性: Electrical:

1. 额定电流: Current Rating  
1.5A/contact terminal
2. 额定电压: Voltage Rating  
30V DC
3. 接触电阻: Contact Resistance  
30 milliohms MAX
4. 耐电压: Dielectric Withstanding Voltage:  
500 V AC For one minute
5. 绝缘电阻: Insulation Resistance:  
1000MEGA ohms MIN

原材料: Raw material:

1. 塑胶: Plastic cement:  
Hing Temperature Thermoplastics,  
PBT/LCP White/ Black
  2. 端子: Contact: Copper Alloy C2680/C5191
  3. 外壳: Shell: SPCC/Copper Alloy C2680
- 电镀: Electroplate:

1. 端子: Contact: Plated Gold in Mating Area:  
Tin On Solder Tails
2. 外壳: Shell:  
Nickel Plating

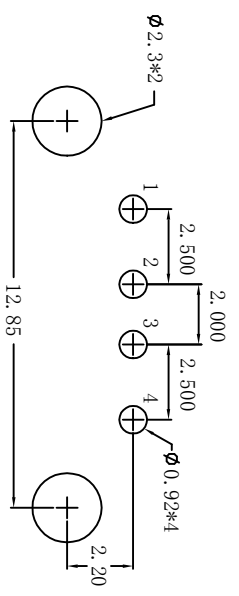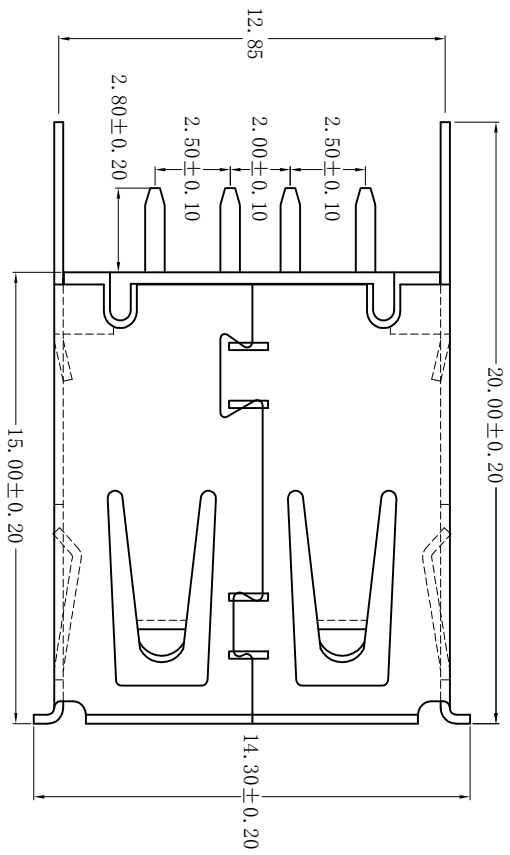

- U223-4031-XXXXX7
- G: 半金G/Fu"  
1: 半金1u"  
3: 半金3u"  
5: 半金5u"  
8: 半金15u"  
9: 镀全金1u"
- 1: PA66  
2: PBT  
6: LCP
- 1: 吸塑盒  
3: 载带冷封  
8: 载带热封
- 1: 黑色  
2: 白色  
7: 蓝色300C

TOLERANCE UNLESS OTHERWISE SPECIFIED	XXX ±0.10 XX ±0.20 X ±0.30	X' ±3 XX' ±2	<b>HLV</b> 深圳市华联威电子科技有限公司 HUA LIAN WEI TECHNOLOGY ELECTRONICS CO.,LTD.
--------------------------------------	----------------------------------	-----------------	---

APPROVED		PART NAME:	USB AF 180度直插直脚15.0
CHECKED		PART No:	U223-4031-X22017
DRAWN	weihong	PROJECTION:	
DATE	2021.07.30	UNIT:	mm
		SCALE	1:1
		SHEET	10F1
		REV.	AO