

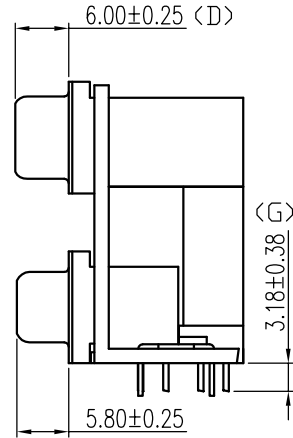
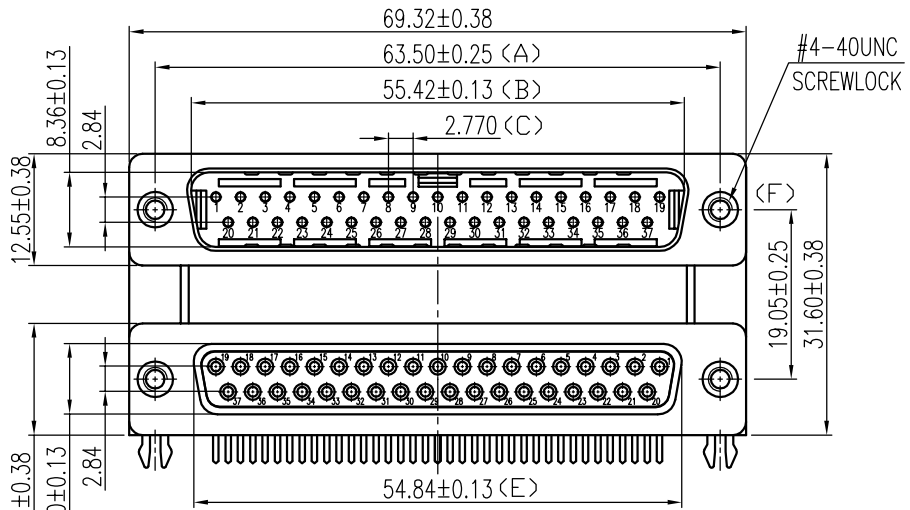


REV.	ECN.NO.	APPD.
A	EXXXXXXXXXX	yangguifeng

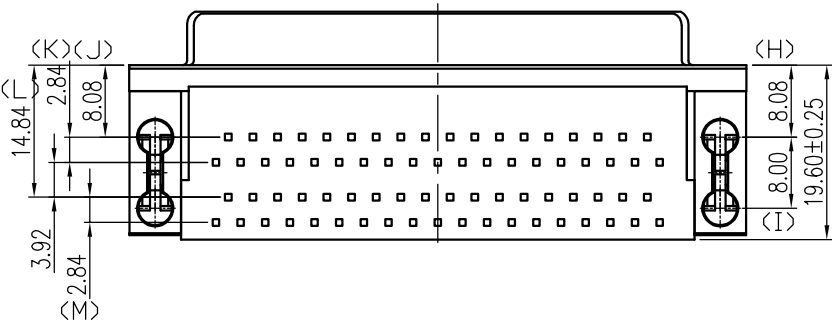


1.SPECIFICATION

- 2.1 Current Rate:5 Amps
- 2.2 Insulator Resistance:100Ω Min.
- 2.3 Dielectric Strength:500V AC PER MIN
- 2.4 Operation Temperature:°55C~+105C
- 2.5 Contact Resistance:30mΩ Max

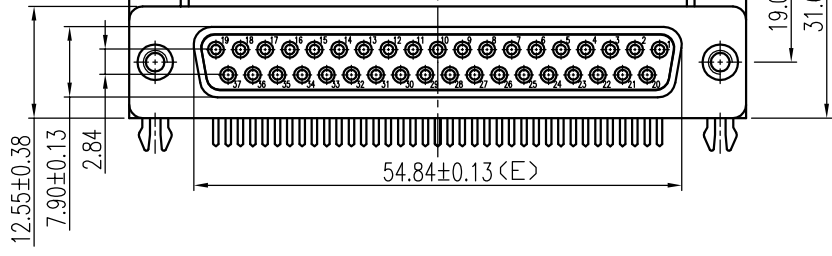

DS114-0331-G217

- 1: 铁壳镀镍
- 1: 黑色
- G: 半金G/Fu"
- 2: PBT

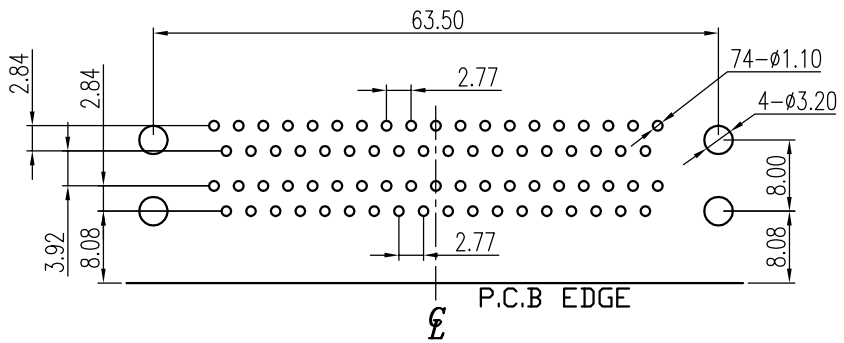

RECOMMENDED P.C.B LAYOUT  
INSPECTION DIMENSION:(A)~(M)

TOLERANCE UNLESS OTHERWISE SPECIFIED		<b>FLW</b> 深圳市华联威电子科技有限公司				
.XXX ±0.10 .XX ±0.20 .X ±0.30		HUA LIAN WEI TECHNOLOGY ELECTRONICS CO;LTD.				
.X' ±3' .XX' ±2'		PART NAME:		DR37公+DR37母铆合卧式		
APPROVED		PART No:		DS114-0331-G217		C
CHECKED		PROJECTION:	UNIT:	SCALE	SHEET	REV.
DRAWN	yangguifeng		mm	1:1	1 OF 1	A
DATE	2021.12.01					