
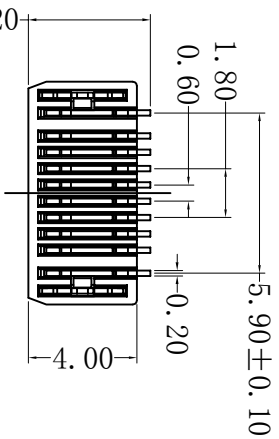
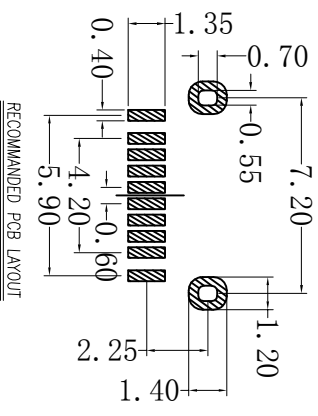
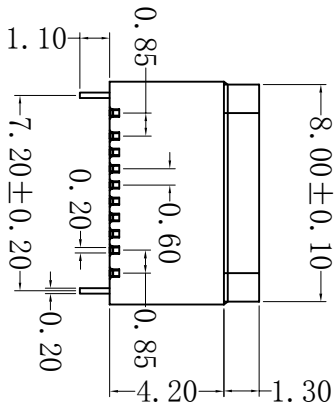
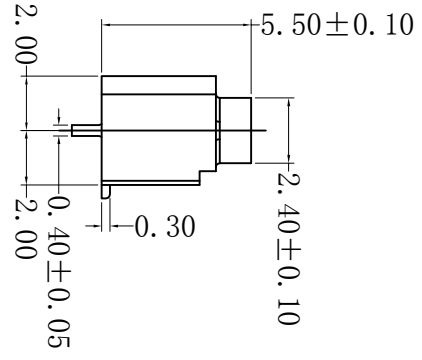


REV.	ECN.NO.	APPD.
A	EXXXXXXXXXXX	yongguifeng



规格说明: Specifications:
电气特性: Electrical:

1. 额定电流: Current Rating
1.5A/contact terminal
2. 额定电压: Voltage Rating
30V DC
3. 接触阻抗: Contact Resistance
30 milliohms MAX
4. 耐电压: Dielectric Withstanding Voltage:
500 V AC AT Sea Level
5. 绝缘阻抗: Insulation Resistance:
1000MEGA ohms MIN

物理性能: Mechanical:

1. 插拔力: Connector Mate and Umate Force
Mate force: 3.57kgf(MAX)
Umate force: 1.02kgf(MIN)
2. 端子保持力: Terminal Retention
1.2kgf(MIN)

原材料: Material:

1. 塑胶: Housing:
Hing Temperature: Thermoplastics,
UL 94V-0 LCP White/Black
2. 端子: Contact: Copper Alloy C5191
3. 卡钩: Shell: Copper Alloy S185301

电镀: Finish:

1. 端子: Contact: Plated Gold in Mating Area:
Tin On Solder Tails
2. 卡钩: Shell:
Nickel Plating

U573-8110-XXXXX8

- 1: 半金1u"
- 3: 半金3u"
- 5: 半金5u"
- G: 半金G/Fu"
- 9: 镀全金1u"
- 4: 镀全亮锡
- 1: PA66
- 2: PBT
- 6: LCP
- 1: 吸塑盒
- 2: 吸塑管
- 3: 载带
- 6: 载带+贴麦拉
- 1: 黑色
- 2: 白色
- 3: 米黄色

TOLERANCE UNLESS OTHERWISE SPECIFIED		HUA LIAN WEI TECHNOLOGY ELECTRONICS CO.,LTD.	
XXX ±0.10	X' ±3	HLW 深圳市华联威电子科技有限公司 HUA LIAN WEI TECHNOLOGY ELECTRONICS CO.,LTD.	
XX ±0.20	.XX ±2		
X ±0.30	.XX ±2		

APPROVED		PART NAME:	TYPE C 10P180度立贴5.5	
CHECKED		PART No:	U573-8110-663038	
DRAWN	yongguifeng	PROJECTION:	UNIT:	SCALE
DATE	2021.12.01		mm	1:1
				1 OF 1
				REV. A