

REV.	ECN.NO.	APPD.
A	/	/

备注

1. 产品规格:






- 1-1. 插入力 35N MAX.
- 1-2. 拔出力 10N MIN. INITIAL 8-20N AFTER 3000 CYCLES
- 1-3. 额定电流 1.0A
- 1-4. 额定电压 30V
- 1-5. 耐久性 3000 CYCLES MIN.
- 1-6. 耐压 100V AC MIN.
- 1-7. 接触阻抗 30m Ω MAX. INITIAL: 40m Ω MAX AFTER 3000 CYCLES
- 1-8. 绝缘电阻 100M Ω MIN
- 1-9. 工作温度 -30° TO +80°

2. 材质

- 2. 1胶芯: LCP UL94V-0
- 2. 2端子: C2680R-H, 镍底, 镀金 1μ
- 2. 3外壳: SUS201, 表面镀镍 50 μ

- 3. 所用材质须符合RoHS要求
- 4. 重点尺寸标识"▲"符号

RECOMMENDED PCB LAYOUT

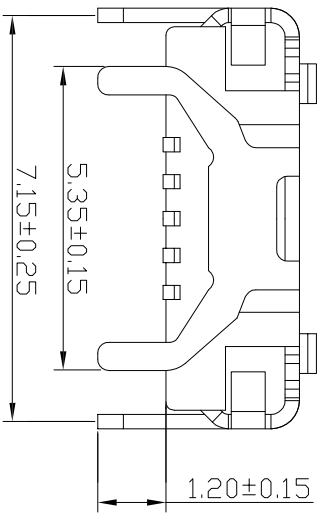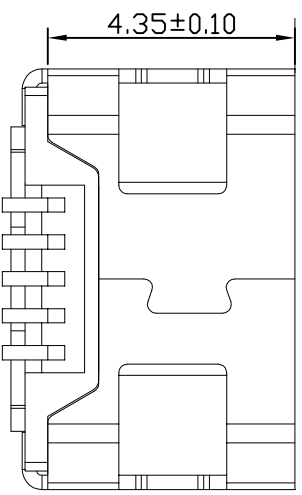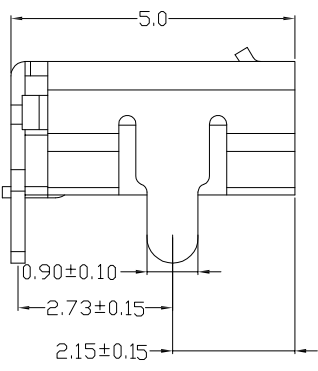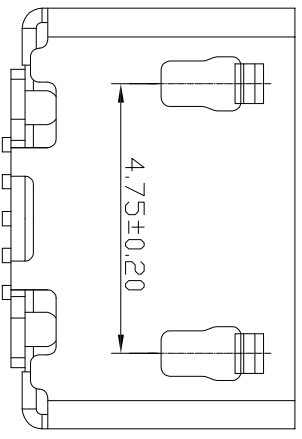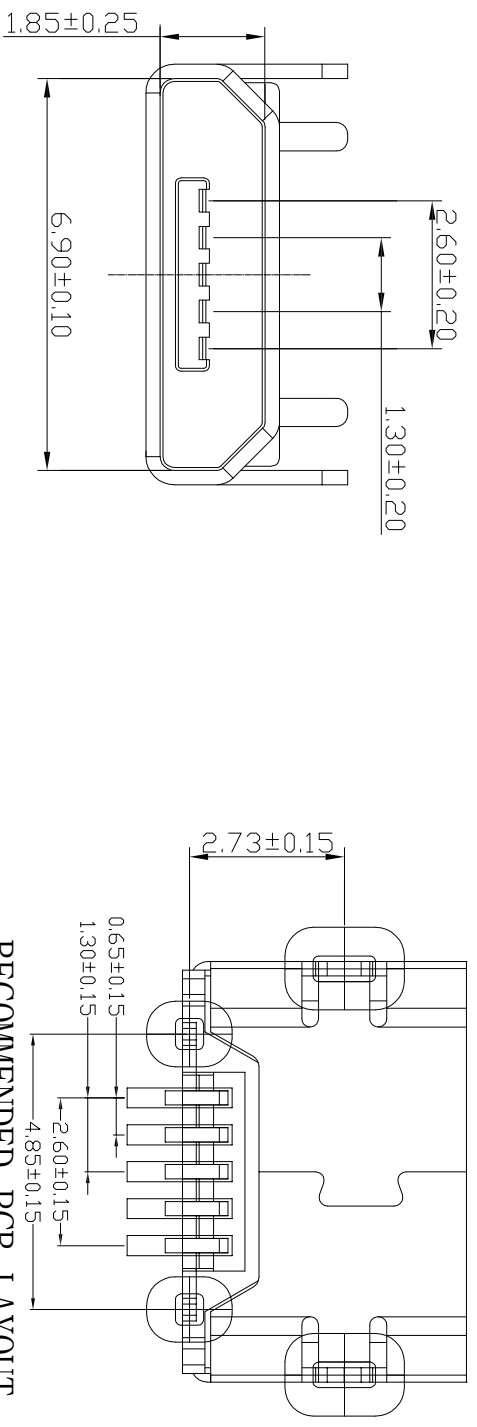

- U442-781X-XXXXX8
- 1: 镀壳镀镍
 - 2: 吸塑管
 - 3: 半金30μ
 - 3: 密封胶带
 - 5: 半金50μ
 - 6: 载带+贴麦拉
 - 6: 载带+贴麦拉
 - 8: 热封载带
 - B: 不锈钢镀镍
 - G: 半金6/Ru
 - 9: 镀半金1μ
 - 4: 镀全壳物
 - 1: 黑色
 - 2: PBT
 - 2: 白色
 - 6: LCP
 - 3: 米黄色

TOLERANCE UNLESS OTHERWISE SPECIFIED		HUA LIAN WEI TECHNOLOGY ELECTRONICS CO.,LTD.	
XXX ±0.10	X' ±3'	HLW 深圳市华联威电子科技有限公司 HUA LIAN WEI TECHNOLOGY ELECTRONICS CO.,LTD.	
XX ±0.20	XX' ±2'		
X ±0.30	XX' ±2'		
.X			
APPROVED		PART NAME:	MICRO 5P/牛角外DIP1, 2无卷边
CHECKED		PART No.:	U442-781X-XXXXX8
DRAWN	weihong	PROJECTION:	
DATE	2021.9.23	UNIT:	mm

SCALE	SHEET	REV.
1:1	10F1	A