
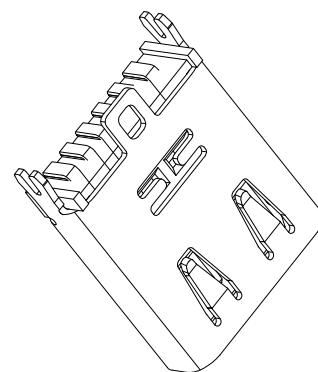








REV.	ECH.NO.	APPD.
A	/	/



B12	GND
B9	VBUS
B5	CC2
A5	CC1
A9	VBUS
A12	GND
PIN	SIGNAL NAME

NOTES:

- MATERIAL: MOLDING: LCP UL94 V-0  
CONTACT: COPPER ALLOY,  
GOLD PLATED Min ON CONTACT AREA, 100u"  
Min TIN (LEAD FREE) ON SOLDER AREA,  
SHELL: SUS201-H,T=0.30±0.03mm  
50u" NICKEL PLATING OVER ALL.
- MECHANICAL: INSERTION: 5~20N.  
EXTRACTION: 8~20N AFTER TEST.  
DURABILITY: 5000 CYCLES
- ELECTRICAL: CURRENT: 3A FOR VBUS;  
1.25A FOR GND PIN.  
0.25A FOR OTHER  
VOLTAGE: 20 V MAX  
WITHSTANDING VOLTAGE: 100V AC R.M.S.  
CONTACT RESISTANCE: 40mΩ MAX.  
INSULATION RESISTANCE: 100MΩ MIN.
- ENVIRONMENTAL TEMPERATURE RANGE -25°C ~ +85°C
- 尺寸标注事项:  
图示有标示(⊗)者为首样全检, 重点管控尺寸;  
产品符合ROHS标准

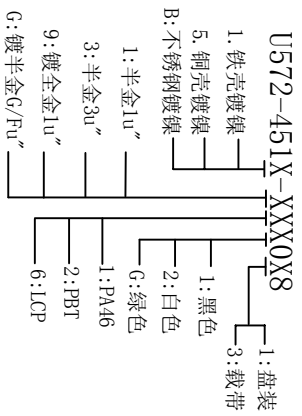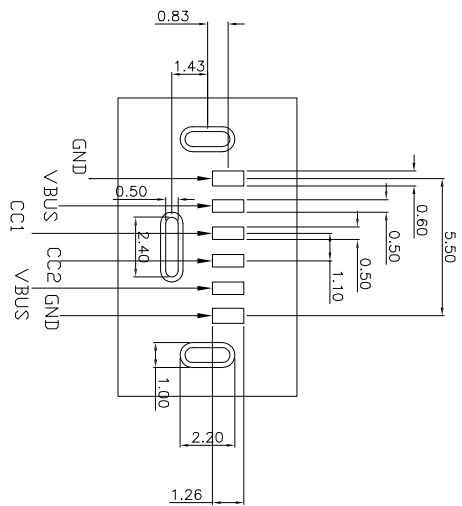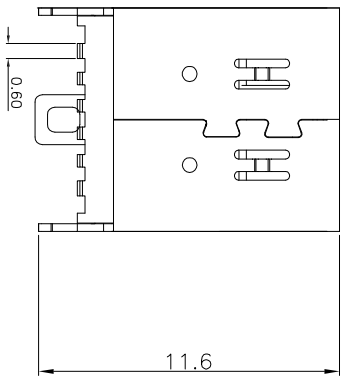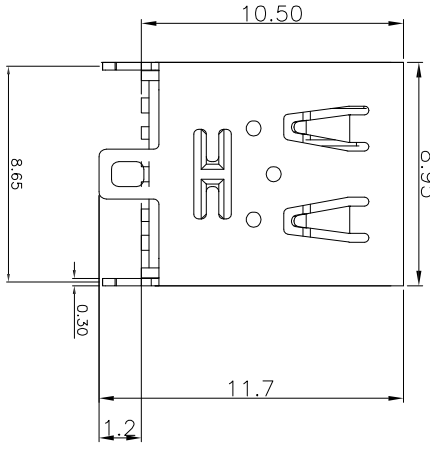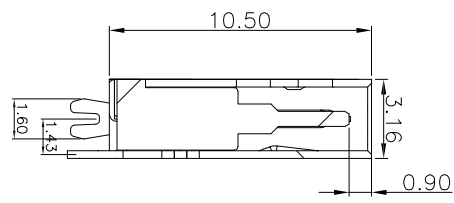

TOLERANCE UNLESS OTHERWISE SPECIFIED		<b>HLW</b> 深圳市华联威电子科技有限公司	
XXX ±0.10	X' ±3'	HUA LIAN WEI TECHNOLOGY ELECTRONICS CO.,LTD.	
XX ±0.20	.XX ±2'		
X ±0.30			
APPROVED	PART NAME:	TYPE C 6P立贴双弹高度10.50	
CHECKED	PART NO:	U572-451X-XXXXX8	
DRAWN	PROJECTION:	UNIT:	SCALE
DATE	2021.9.23	mm	1:1
			SHEET
			10F1
			REV.
			A