
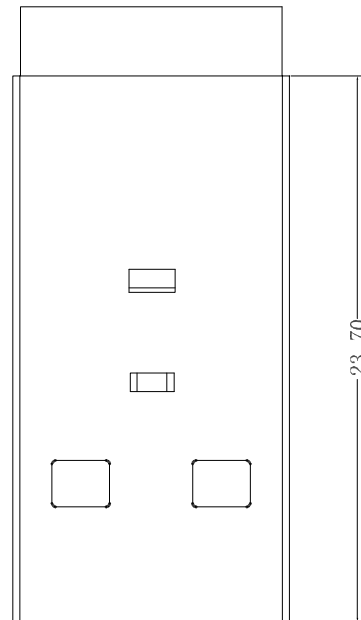
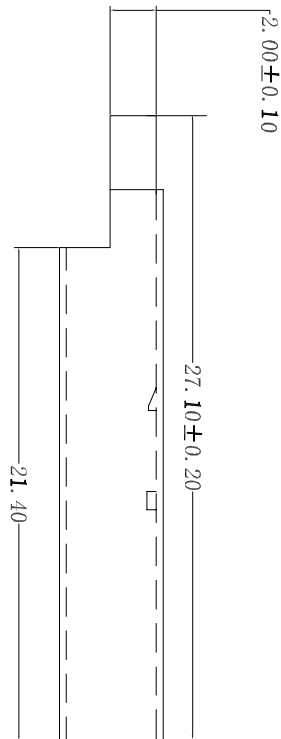



REV.	ECN.NO.	APPD.
A	/	/

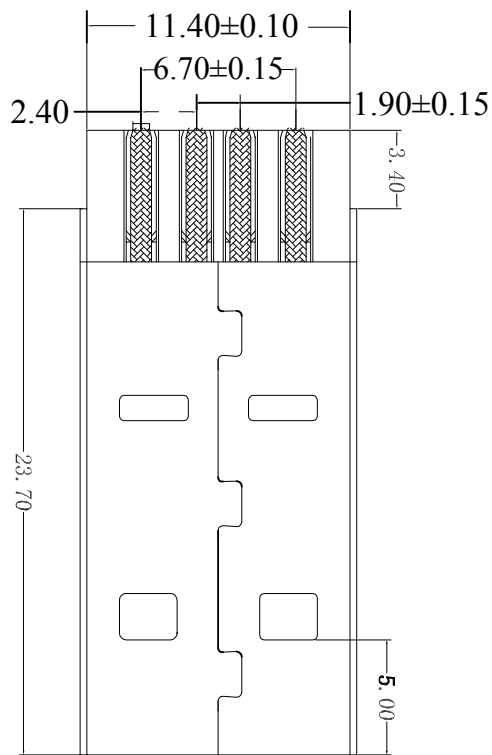

**MECHANICAL**  
 Insulator material: PBT@glass-fibre reinforced  
 UL 94v-0  
 Plastic: Brass  
 Nut specifications:  
 Shell: nickel (or tin, gold) plated  
 Number of contact: 04  
 Durability: 5000 cycles

**ELECTRICAL**  
 Current rating: 5Amp  
 Dielectric withstanding voltage: AC 500Vmin (500V dc)  
 50um max  
 Contact resistance: 20m max  
 Working temperature: -50° c++ 150° c

**Notes:**  
 1. 产品外观不得有压伤, 缩水, 缺胶等不良。毛边不大于0.05mm。  
 2. 产品组装后无不通现象。  
 3. 产品材质: 端子: C2880, T=0.20mm 外壳: Spec, T=0.30mm 胶芯: PBT  
 4. 电镀规格: 端子镀半金1u" 外壳镀镍100U". 24H

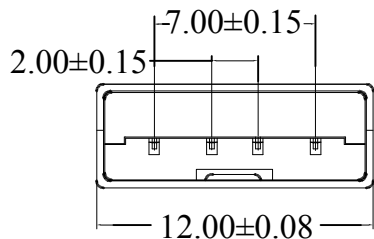

U218-102X-XXX0X7

- 1: 铁壳镀镍
- 5: 铜壳镀镍
- 6: 铜壳镀雾锡
- 1: 半金1u"
- J: 半金3u"
- K: 半金5u"
- 7: 半金10u"
- 8: 半金15u"
- G: 半金G/Fu"
- 1: 吸塑盒
- 8: 载带
- 9: 载带+贴麦拉
- 1: 黑色
- 2: PBT
- 5: PA9T
- 6: LCP

TOLERANCE UNLESS OTHERWISE SPECIFIED	
.XXX ±0.10	.X' ±3'
.XX ±0.20	.XX' ±2'
.X ±0.30	

**HLW** 深圳市华联威电子科技有限公司

HUA LIAN WEI TECHNOLOGY ELECTRONICS CO.;LTD.

APPROVED		PART NAME:	USB AM 短体加长无脚			
CHECKED		PART No:	U218-102X-X22017		C	
DRAWN	weihong	PROJECTION:	UNIT:	SCALE	SHEET	REV.
DATE	2021.7.23		mm	1:1	10F1	A