


REV.	ECN.NO.	APPD.
A	/	ZFY

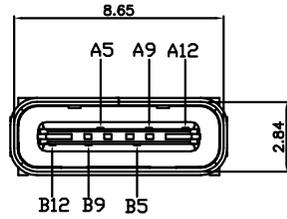

B12	GND
B9	VBUS
B5	CC2
A5	CC1
A9	VBUS
A12	GND
PIN	SIGNAL NAME

NOTES:

1.MATERIAL:

MOLDING: LCP UL94 V-0  
 CONTACT:COPPER ALLOY.  
 GOLD PLATED Min ON CONTACT AREA,100u"  
 Min TIN (LEAD FREE) ON SOLDER AREA,  
 SHELL: SUS201-H,T=0.30±0.03mm  
 50u" NICKEL PLATING OVER ALL.

2.MECHANICAL:

INSERTION: 5~20N.  
 EXTRACTION: 8~20N AFTER TEST.  
 DURABILITY: 5000 CYCLES

3.ELECTRICAL:

CURRENT: 3A FOR VBUS;  
 1.25A FOR GND PIN.  
 0.25A FOR OTHER.  
 VOLTAGE: 20 V MAX  
 WITHSTANDING VOLTAGE: 100V AC R.M.S.  
 CONTACT RESISTANCE: 40mΩ MAX.  
 INSULATION RESISTANCE: 100MΩ MIN.


4.ENVIRONMENTAL

TEMPERATURE RANGE -25°C ~ +85°C


5. 尺寸标注事项:

图示有标示⊗者为首样全检,重点管控尺寸.

6. 产品符合RoHS标准

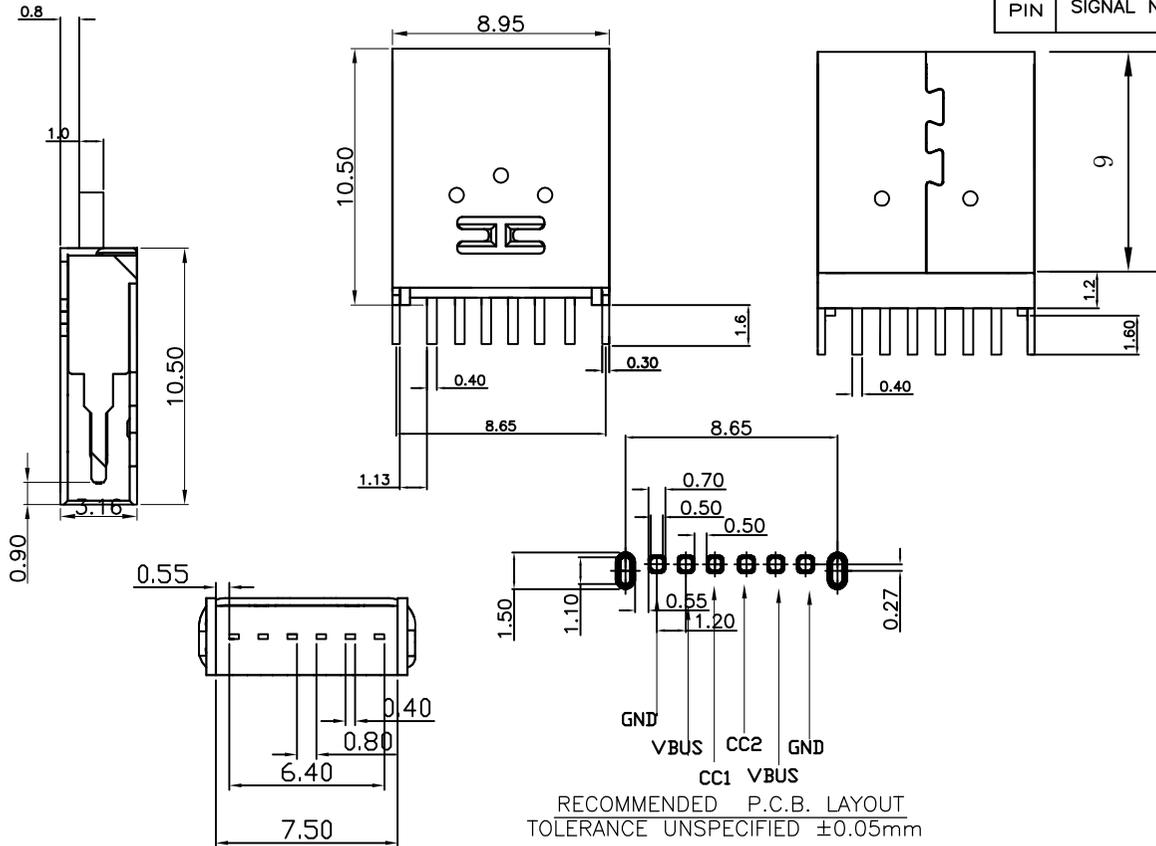

RECOMMENDED P.C.B. LAYOUT  
 TOLERANCE UNSPECIFIED ±0.05mm

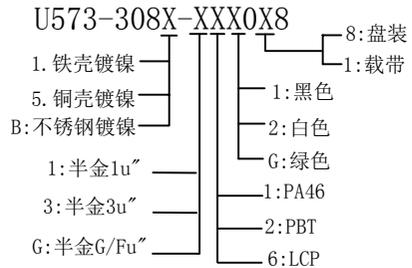

TOLERANCE UNLESS OTHERWISE SPECIFIED		<b>HLW</b> 深圳市华联威电子科技有限公司				
.XXX ±0.15 .XX ±0.20 .X ±0.30		.X ±0.20 .XX ±0.25		HUA LIAN WEI TECHNOLOGY ELECTRONICS CO;LTD.		
APPROVED		PART NAME:	TYPE C 6P立插10.5			
CHECKED		PART No:	U573-308X-X61018	C		
DRAWN	ZhangFenYan	PROJECTION:	UNIT:	SCALE	SHEET	REV.
DATE	2018.10.10		mm	1:1	10F1	A