

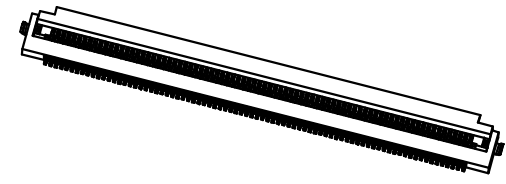



REV.	ECN.NO.	APPD.
A	XXXXXXXXXX	yangguifeng

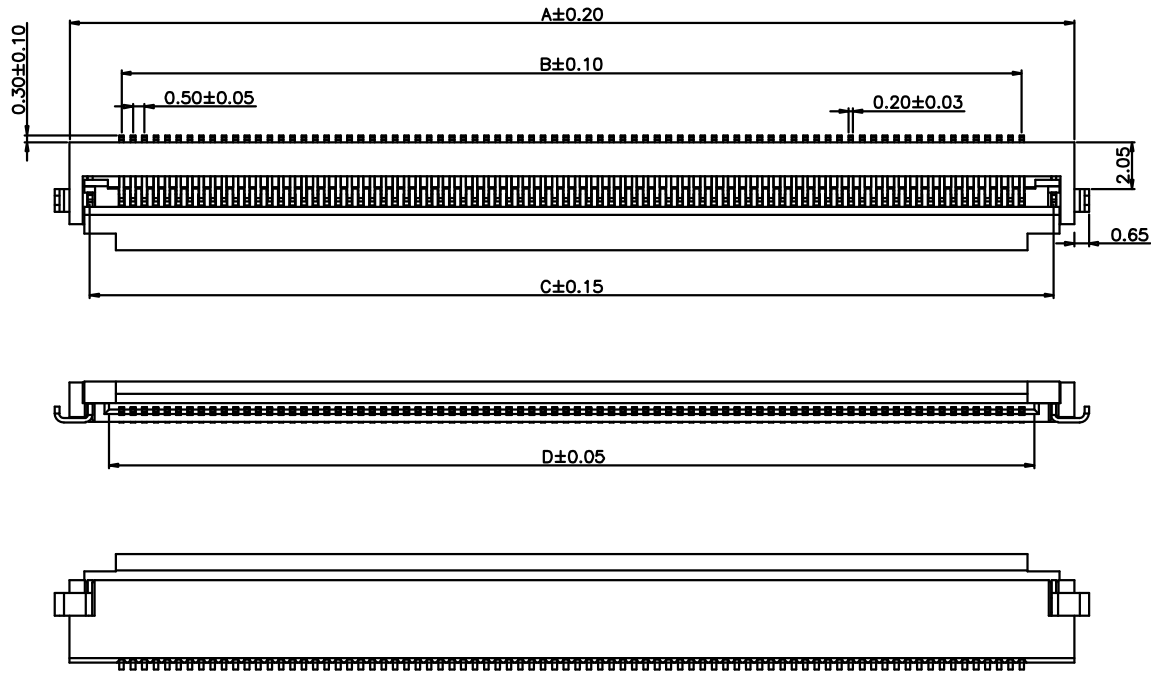


- Specifications:
1. Rated Voltage : 125V AC/DC
  2. Rated Current : 1A AC,DC
  3. Withstand Voltage : 200V AC/minute
  4. Contact Resistance : 50mΩ(MAX.)
  5. Insulation Resistance : 100MΩ(MIN.)
  6. Storage Temperature Range: -40°C~+85°C;
  7. Operation Temperature Range: -25°C~+70°C;

216104-1090-G63018

G: 半金G/Fu”  
 6: LCP  
 1: 吸塑盒  
 3: 米黄色

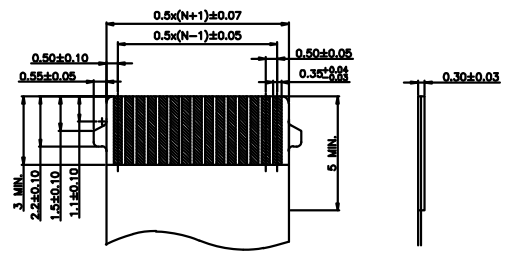


RECOMMENDED FFC DIM

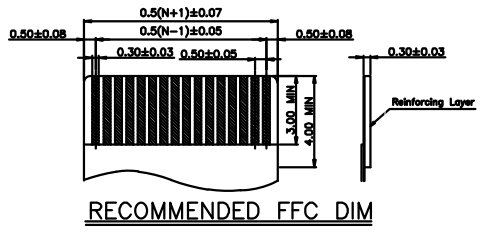

RECOMMENDED FFC DIM

No. of Contacts	DIM.			
	A	B	C	D
60	34.10	29.50	32.30	30.60
64	36.10	31.50	34.30	32.60
65	36.60	32.00	34.80	33.10
66	37.10	32.50	35.30	33.60
68	37.10	33.50	35.80	34.10
80	44.10	39.50	42.30	40.60

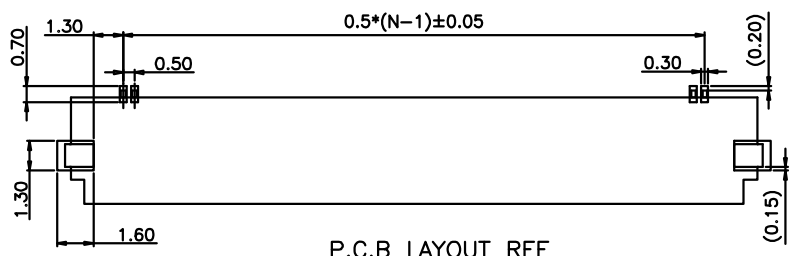

P.C.B LAYOUT REF

TOLERANCE UNLESS OTHERWISE SPECIFIED	
.XXX ±0.10	.X' ±3'
.XX ±0.20	.XX' ±2'
.X ±0.30	

**FLW** 深圳市华联威电子科技有限公司  
 HUA LIAN WEI TECHNOLOGY ELECTRONICS CO.;LTD.

APPROVED		PART NAME:	FPC1.8间距0.5 80P			
CHECKED		PART No:	216104-1090-G63018	C		
DRAWN	yangguifeng	PROJECTION:	UNIT:	SCALE:	SHEET:	REV.
DATE	2021.12.01		mm	1:1	1 OF 1	A