


ECN.NO.	ECN DESCRIPTION	REV.	DATE	APPD.
/	/	A	2015.06.19	pcy
/	新增电镀码说明	B	2017.07.11	YS

- NOTES:
- MATERIL
    - HOUSING:HI-TEMP PLASTIC (UL94-V-0),BLACK
    - CONTACT:COPPER ALLOY(T=0.20),  
PLATING:GOLD PLATED ON CONTACT AREA,  
TIN PLATED ON SOLDER TAILS,UNDER  
NICKEL PLATED.
    - SHELL:BRASS(T=0.40),PLATING:NICKEL PLATED,
    - SPRING SHELL: STAINLESS SUS304 T=0.20mm
    - COVER: HI-TEMP,PLASTIC(UL94V-0)BLACK,
  - SPECIFICATION:
    - CURRENT RATING: 0.5 A
    - CONTACT RESISTANCE: 30mΩ MAX.
    - DIELECTRIC WITHSTANDING VOLTAGE: 500V AC  
R.M.S FOR ONE MINUTE.
    - INSULATION RESISTANCE: 100MΩ MIN AT 500V DC.
    - OPERATING TEMPERATURE: -25° TO +85°.
    - DURABILITY: 10000 CYCLES.
    - MATING FORCE: 4.5KG MAX.
    - UNMATING FORCE: 1.0KG MIN

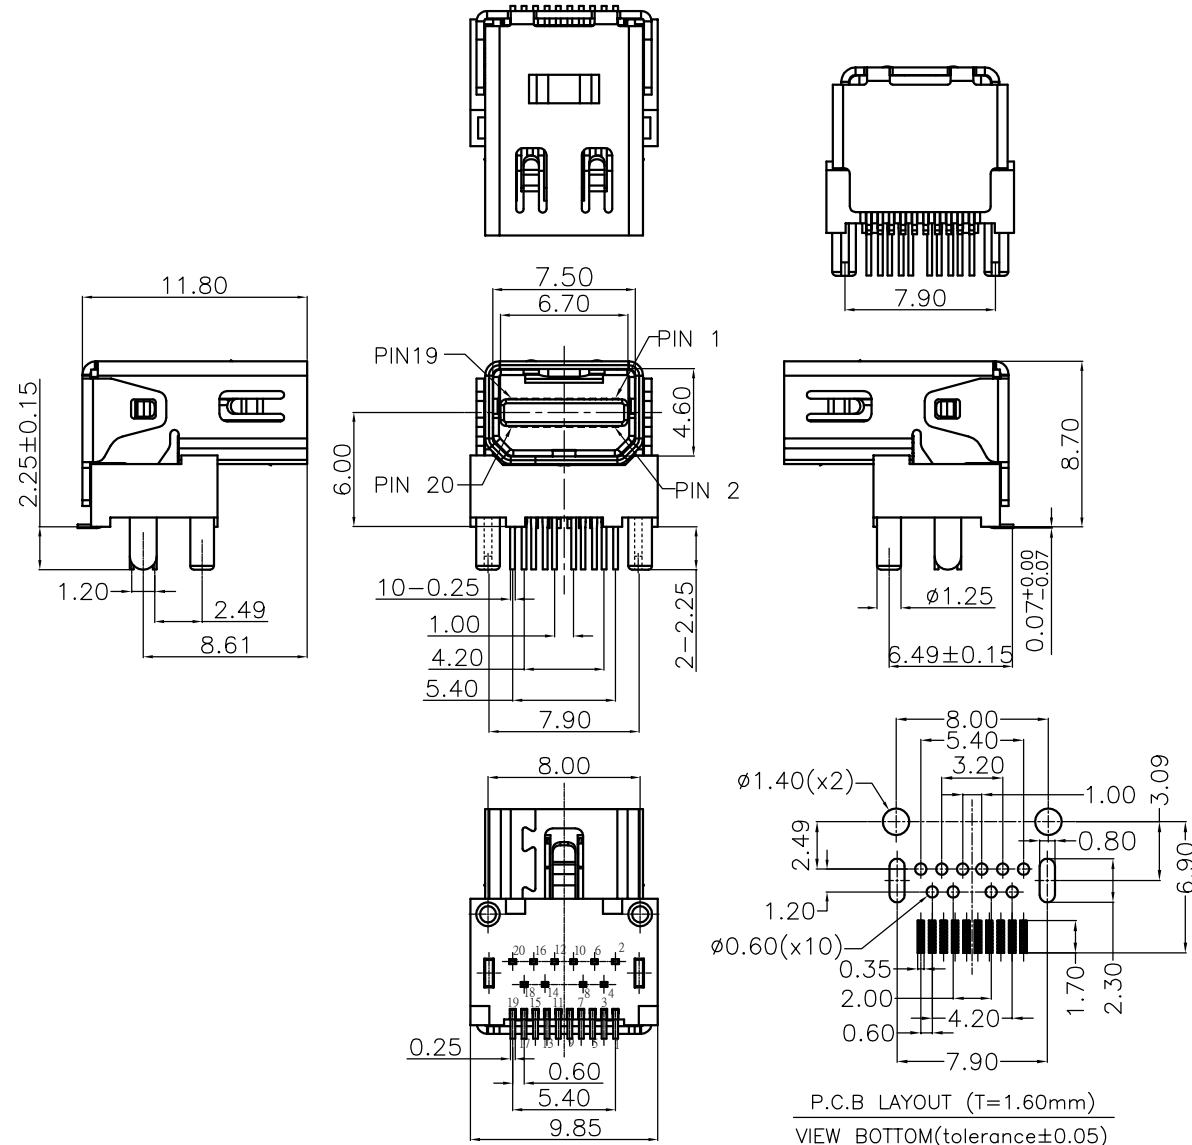

DP23-0118-16181

8: 铜壳镀金

1: 半金1u"

1: RoHS 防火

8: 载带

1: 黑色

6: LCP

P.C.B LAYOUT (T=1.60mm)  
VIEW BOTTOM(tolerance $\pm$ 0.05)

TOLERANCE UNLESS OTHERWISE SPECIFIED		FLW 深圳市华联威电子科技有限公司				
.XXX $\pm$ 0.10	.XX $\pm$ 0.20	.X $\pm$ 0.30	HUA LIAN WEI TECHNOLOGY ELECTRONICS CO.;LTD.			
.X' $\pm$ 3'	.XX' $\pm$ 2'					
APPROVED		PART NAME:	mini Displayport 母20PIN SMT式 无弹片			
CHECKED		PART No:	DP23-0118-16181	C		
DRAWED	pengchaoyong	PROJECTION:	UNIT:	SCALE:	SHEET:	REV.
DATE	2015.06.19		mm	1:1	10F1	B