

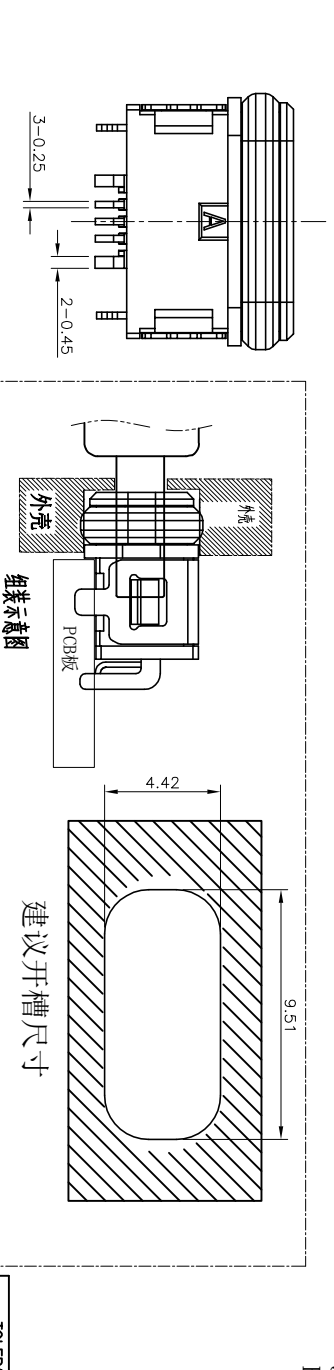
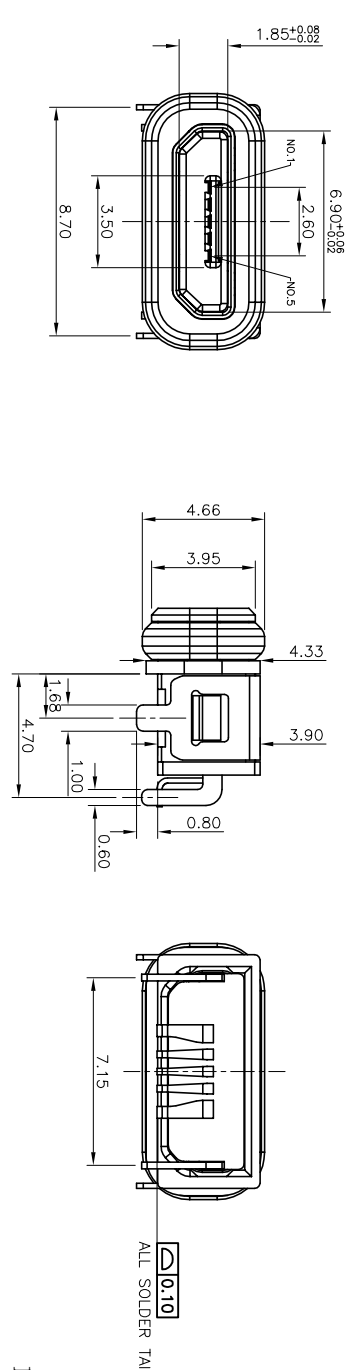


REV.	ECN NO.	APPD.
A	EXXXXXXXXXXX	yangguifeng

- SPECIFICATIONS:
1. ELECTRICAL CHARACTERISTICS:
- 1.1. RATING: 3A;
 - 1.2. CONTACT RESISTANCE: 30 mΩ MAX. (INITIAL);
 - 1.3. DIELECTRIC WITHSTANDING: 100V AC MIN.;
 - 1.4. INSULATION RESISTANCE: 100MΩ MIN.;
 2. DURABILITY: 5,000 CYCLES MIN.;
 3. INSERTION FORCE: 5-20N;
 4. EXTRACTION FORCE: 5-20N;
 5. WATER PROOFNESS: THIS PRODUCT IS BASED ON IPX8.
 6. PLUG INTERFACE DIMENSIONS CONFORM TO USB2.0 SPEC.
 7. PACKAGING: TAPE & REEL.

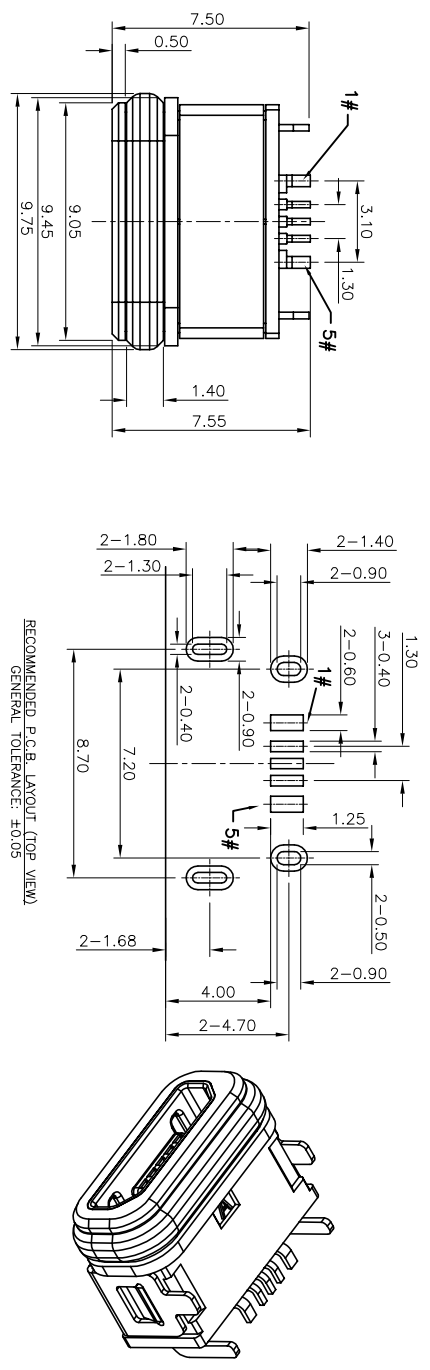

- U442-011X-XXXXX8
- 1: 铁壳镀镍
 - 5: 铜壳镀镍
 - B: 不锈钢镀镍
 - 1: 镀全亮锡
 - 1: PA66
 - 2: PBT
 - 10: PA10T
 - 1: 半金1u"
 - 3: 半金3u"
 - 5: 半金5u"
 - G: 半金G/Fu"
 - 9: 镀全金1u"
 - 4: 镀全亮锡
 - 1: 吸塑盒
 - 2: 吸塑管
 - 3: 载带
 - 6: 载带+贴麦拉
 - 1: 黑色
 - 2: 白色
 - 3: 米黄色

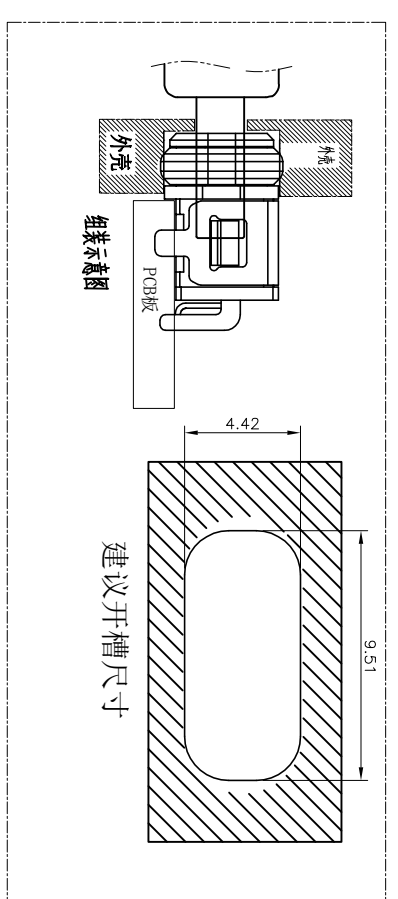

Contact Number	Signal Name	Remarks	3	Shell 1/2	2	Ni Plating
1#	VBUS	Power	2	Contact	6	Phosphor bronze T=0.20mm
2#	D-	Date-	1	Housing	1	Au/Ni Plating PA10T (G.F30%)
3#	D+	Date+				
4#	ID	Reserve or Ground				
5#	GND	Ground				

TOLERANCE UNLESS OTHERWISE SPECIFIED		OTHERWISE SPECIFIED		PART NAME:	MICRO 5P 90度SMT四脚防水8级
XXX ±0.10	XX ±0.20	X ±3	.XX ±2		
.X	±0.30			PART No:	U442-011B-G91018
APPROVED		CHECKED		DRAWN	yangguifeng
DATE	2021.12.01	PROJECTION:		UNIT:	mm
				SCALE	1:1
				SHEET	1 OF 1
				REV.	A

HLW 深圳市华联威电子科技有限公司
HUA LIAN WEI TECHNOLOGY ELECTRONICS CO.,LTD.