
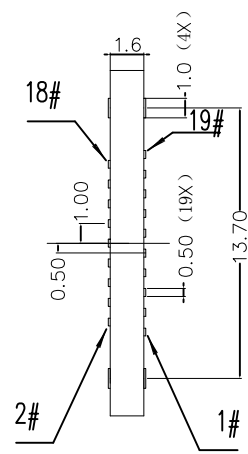
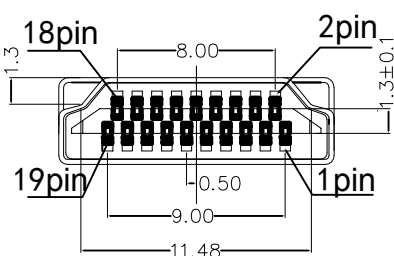
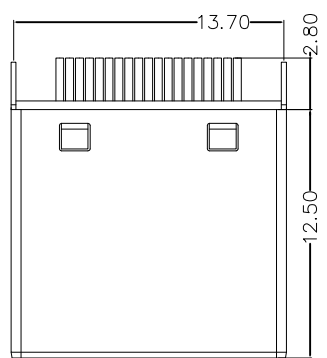
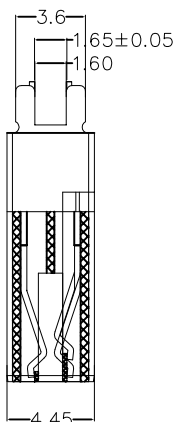


REV.	ECN.NO.	APPD.
A0	/	/

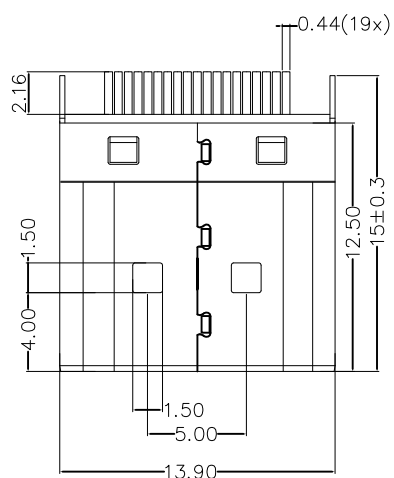

P.C.B LAYOUT

规格:

1. 插入力: 44. 1N MAX.
2. 拔出力: 7~25N
3. 耐久性: 10000 CYCLES MIN.
4. 额定电流: 0. 5A
5. 额定电压: 40V MAX
6. 耐电压: 500V AC MIN. (UNMATED)
300V AC MIN. (MATED)
7. 接触阻抗: 30mΩ MAX.
8. 绝缘电阻: 100MΩ MIN (UNMATED)
10MΩ MIN (MATED)
9. 工作温度: -20°C TO +85°C
10. 所用材质须符合RoHS要求

HD22-321X-XXX0X8

- 1: 铁壳镀镍
- 5: 铜壳镀镍
- 4: 铁壳镀金
- 8: 铜壳镀金
- 1: 半金1u"
- 3: 半金3u"
- G: G/F
- 1: 吸塑盒
- 3: 冷封载带
- 8: 热封载带
- 1: 黑色
- 3: 米黄色
- 1: PA66
- 2: PBT
- 6: LCP

TOLERANCE UNLESS OTHERWISE SPECIFIED		FLW 深圳市华联威电子科技有限公司					
.XXX ±0.10		HUA LIAN WEI TECHNOLOGY ELECTRONICS CO;LTD.					
.XX ±0.20		.X' ±3'		PART NAME:		HDMI 19P/M 插板1.6H款	
.X ±0.30		.XX' ±2'		PART No:		HD22-3215-G61018 C	
APPROVED		DRAWN	weihong	PROJECTION:	UNIT:	SCALE	SHEET
CHECKED		DATE	2021. 07. 29		mm	1:1	10F1
							REV.
							A0