

REV.	ECN.NO.	APPD.
A	/	/





**材质**

塑胶 : PA6T/LCP-UL94 V-0  
 端子 : 黄铜  
 接触电镀: 镀金 Gold flash

**产品参数**

额定电流 : 2A  
 耐电压值: ≤550V AC  
 工作温度: -40° C to +105° C  
 接触电阻: ≤20mΩ  
 绝缘电阻: ≥1000MΩ  
 最大处理温度: 230° C-265° C

Pos.	DIM A	DIM B
10P	25.80	8.00
12P	27.80	10.00
14P	29.80	12.00
16P	31.80	14.00
20P	35.80	18.00
22P	37.80	20.00
24P	39.80	22.00
26P	41.80	24.00
30P	45.80	28.00
32P	47.80	30.00
34P	49.80	32.00
40P	55.80	38.00
44P	59.80	42.00
48P	63.80	46.00
50P	65.80	48.00
60P	75.80	58.00
64P	79.80	62.00
68P	83.80	66.00

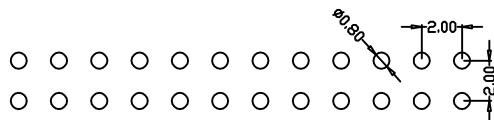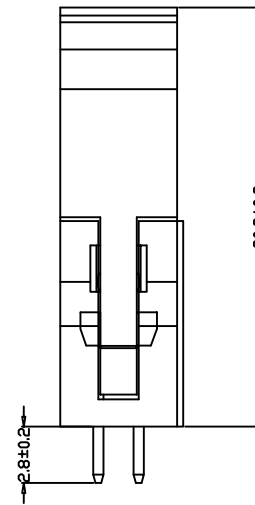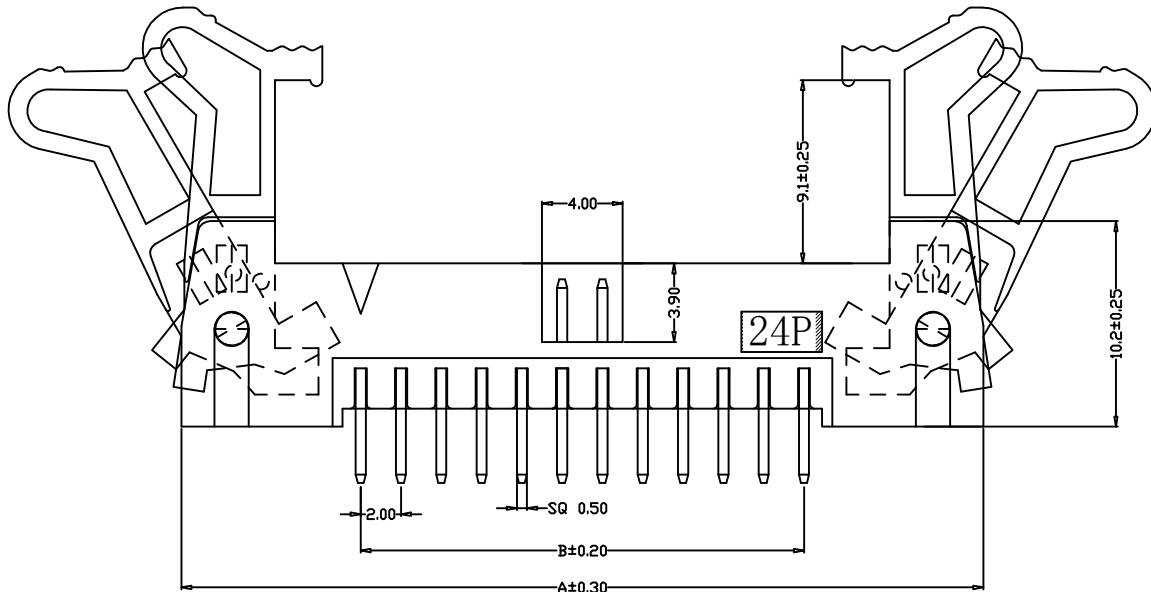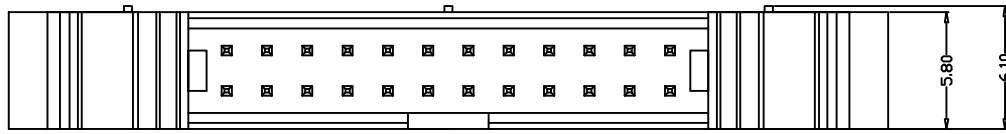

P. C. B LAYOUT

216104-1060-G31018

- 1: 吸塑盘
- 2: 吸塑管
- 5: 袋装
- 7: 管装

TOLERANCE UNLESS OTHERWISE SPECIFIED		<b>FLW 深圳市华联威电子科技有限公司</b>			
.XXX ±0.10 .XX ±0.20 .X ±0.30		HUA LIAN WEI TECHNOLOGY ELECTRONICS CO.;LTD.			
.X' ±3' .XX' ±2'		PART NAME: 2.0间距牛角 NNP 直插 长耳扣5PIN			
APPROVED		PART No:		216104-1060-G31018	
CHECKED					C
DRAWN	weihong	PROJECTION:	UNIT:	SCALE:	SHEET
DATE	2021.9.23		mm	1:1	10F1
					REV. A