


REV.	ECN.NO.	APPD.
A	/	pcy

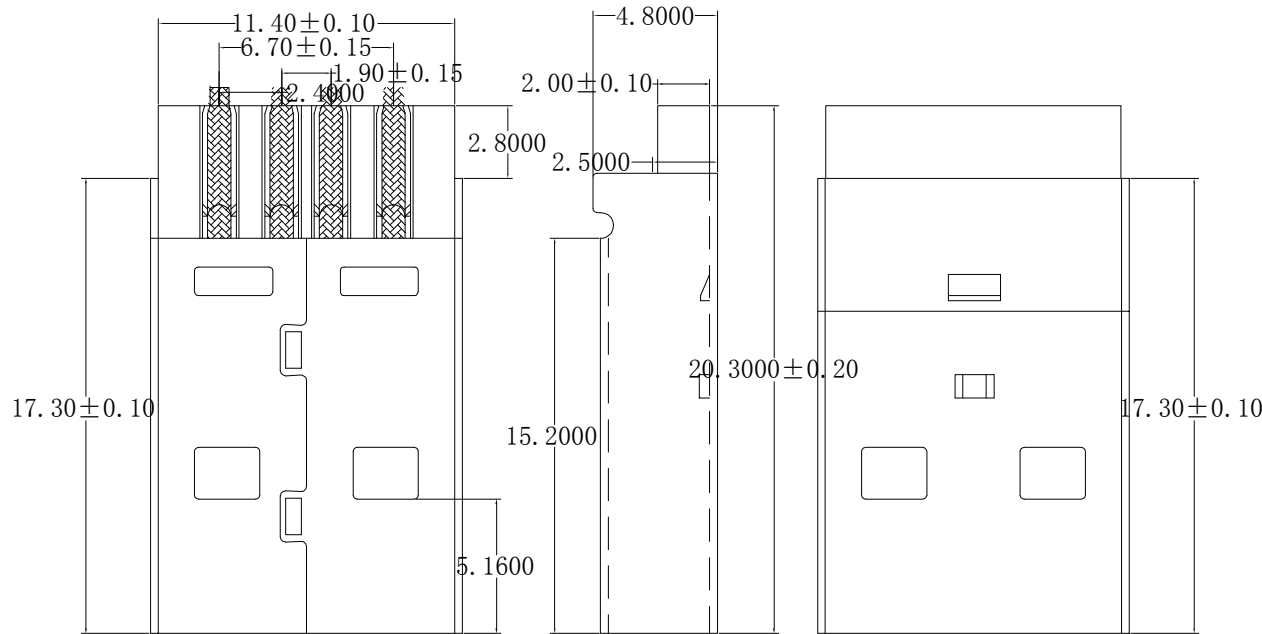

MECHANICAL

Insulator material:

PBT@glass-fibre reinforced

UL 94v-0

plastic:Brass

NUt specifications:

Shell:nicdel(or tin,gold)plated

Number of cntact:04.

Durabil tty:5000 cycles

ELECTRICAL

Current rating:5Amp

Dielectric withstanding voltage:AC

500vmin(500v dc)

500m max


Contactresistance:

25m max

Working temperayure:-50° c--+

150° c

料号编码原则

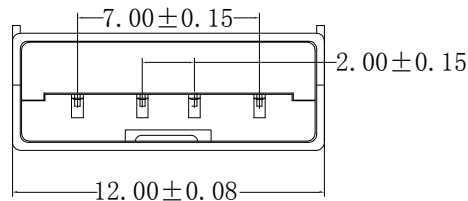

Notes:

1. 产品外观不得有压伤，缩水，缺胶等不良。毛边不大于0.05mm.
2. 产品组装后无不导电现象。
3. 产品材质: 端子:C2680, T=0.20mm
外壳: Spcc, T=0.30mm
胶芯: PBT
4. 电镀规格: 端子镀半金锡1U' 外壳镀锌100U'. 24H

U218-301X-XXX0X7

- 1:Iron alloy Ni plating
- 5:Copper alloy Ni plating
- 1:Au 1u"
- 3:Au 3u"
- 5:Au 5u"
- 7:Au 10u'
- 8:Au 15u"
- G:Au G/Fu"
- 1:tray
- 2:Tube
- 7:bagged IN bags
- 9:Tape&Reel+Mylar
- 1:Black
- 2:White
- 3:Beige
- N.Pure White
- 1:PA66
- 2:PBT
- 6:LCP

TOLERANCE UNLESS OTHERWISE SPECIFIED		FLW 深圳市华联威电子科技有限公司				
.XXX ±0.10		HUA LIAN WEI TECHNOLOGY ELECTRONICS CO;LTD.				
.XX ±0.20		.X' ±3'				
.X ±0.30		.XX' ±2'				
APPROVED		PART NAME:	USB AM短体焊线			
CHECKED		PART No:	U218-3011-X22077			C
DRAWN	Shen	PROJECTION:	UNIT:	SCALE	SHEET	REV.
DATE	2021.09.01		mm	1:1	10F1	A