
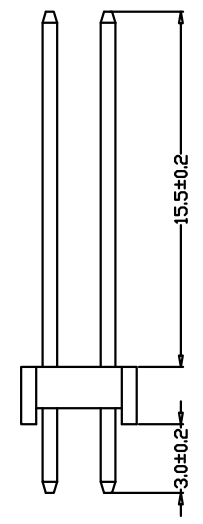
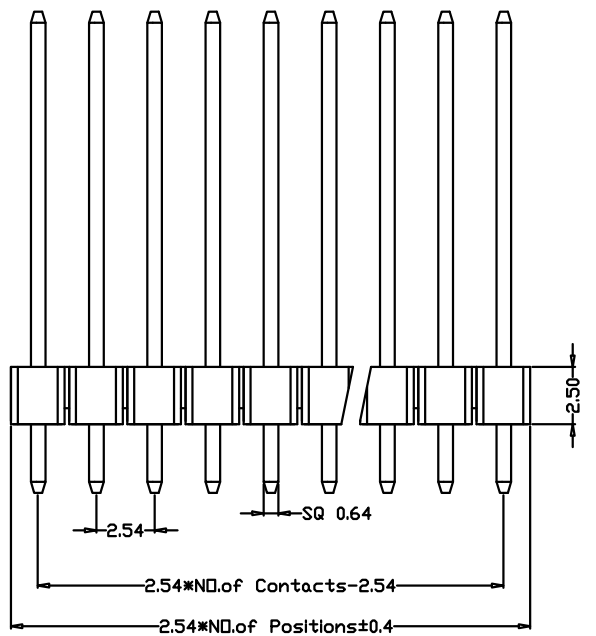



REV.	ECN.NO.	APPD.
A	EXXXXXXXXXX	chenjianhui

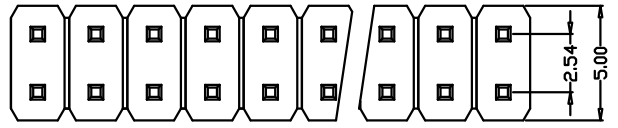

- 技术指标 (Technical Index) :
1. 工作温度 (Temperature range) : -25° C-85° C.
  2. 额定电压 (Rated voltage) : 250V DC/AC (rms)
  3. 额定电流 (Rated current) : 5A AC, DC
  4. 接触阻抗 (CONTACT Resistance) :  $\leq 25m\Omega$
  5. 耐压值 (Withstanding voltage) : 1500V AC/minute
  6. 绝缘阻抗 (Insulation resistance)  $\geq 1000M\Omega$

216104-1246-G31078

G: 镀金G/Fu  
 3: PA46  
 7: 袋子  
 1: 黑色

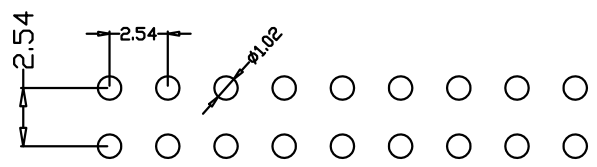

P. C. B LAYOUT

TOLERANCE UNLESS OTHERWISE SPECIFIED		<b>FLW</b> 深圳市华联威电子科技有限公司											
		HUA LIAN WEI TECHNOLOGY ELECTRONICS CO;LTD.											
.XXX ±0.10	.XX ±0.20	.X ±0.30	.X' ±3'	.XX' ±2'	APPROVED		PART NAME:	排针 2.54间距 2x5P 双排 L=21.0					
CHECKED		chenjianhui		PART No:		216104-1246-G31078		C					
DRAWN		DATE		PROJECTION:		UNIT:		SCALE:		SHEET:		REV.	
2022.10.22		DATE		mm		1:1		10F1		A			

由 Autodesk 教育版产品制作

由 Autodesk 教育版产品制作