
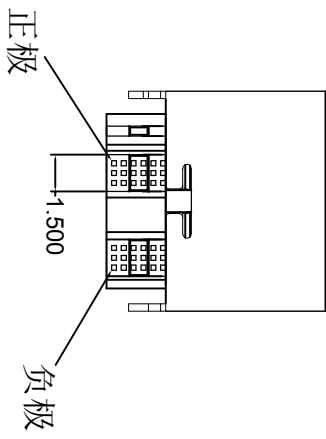



REV.	ECH. NO.	APPD.
A	✓	ZFY

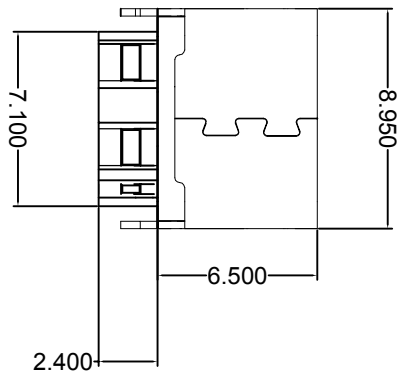

NOTES:

1. MATERIAL:

MOLDING: LCP UL94 V-0
 CONTACT: COPPER ALLOY.
 GOLD PLATED Min. ON CONTACT AREA, 100u"
 Min. TIN (LEAD FREE) ON SOLDER AREA,
 SHELL: SUS201-H,T=0.30±0.03mm
 50u" NICKEL PLATING OVER ALL.

2. MECHANICAL:

INSERTION: 5~20N.
 EXTRACTION: 8~20N AFTER TEST.
 DURABILITY: 5000 CYCLES

3. ELECTRICAL:

CURRENT: 3A FOR VBUS;
 1.25A FOR GND PIN.
0.25A FOR OTHER.

VOLTAGE: 20 V MAX
 WITHSTANDING VOLTAGE: 100V AC R.M.S.
 CONTACT RESISTANCE: 40mΩ MAX.
 INSULATION RESISTANCE: 100MΩ MIN.


4. ENVIRONMENTAL

TEMPERATURE RANGE -25°C ~ +85°C

5. 尺寸标注事项:

图示有标示"⊗"为首样全检, 重点管控尺寸.

6. 产品符合RoHS标准.

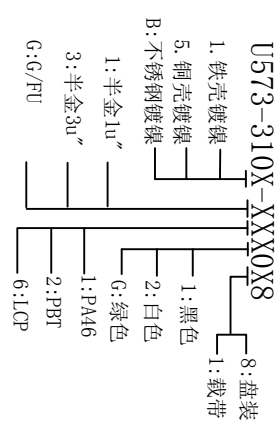

TOLERANCE UNLESS OTHERWISE SPECIFIED		HLW 深圳市华联威电子科技有限公司	
XXX ±0.15	XX ±0.20	HUA LIAN WEI TECHNOLOGY ELECTRONICS CO.,LTD.	
XX ±0.30	X ±0.5		
X ±2			
APPROVED	PART NAME:	TYPE-C 2P焊线	
CHECKED	PART No:	U573-310X-XXXXX8	
DRAWN	PROJECTION:	UNIT:	SCALE
DATE	2018.10.10	mm	1:1
			SHEET
			10F1
			REV.
			A