
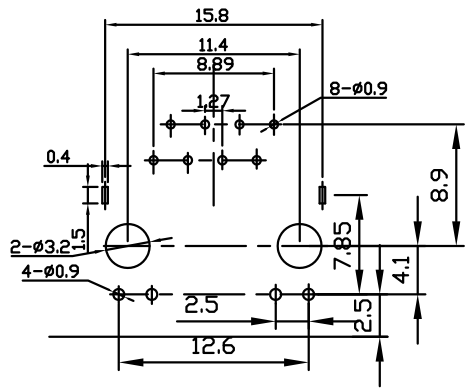
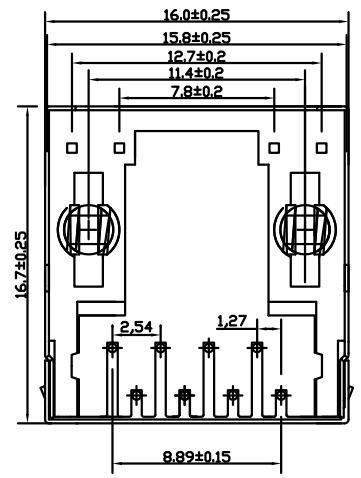
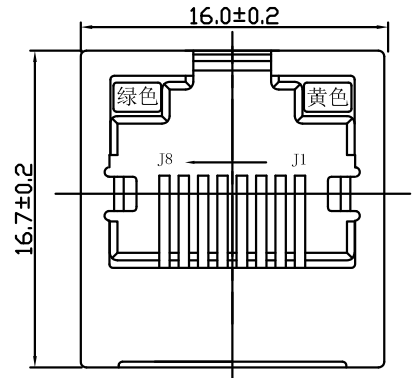


REV.	ECN.NO.	APPD.
A0	/	/
A1	/	weihong

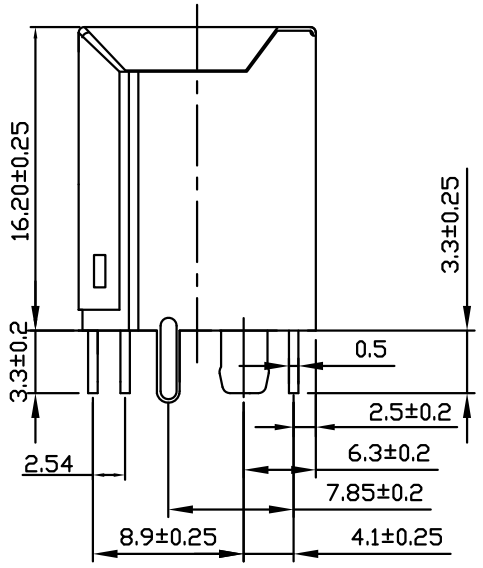

P.C.B参考图  
(建议板后1.6mm)

- NOTES:
- MATERIAL:
    - Housing:thermoplastic plastics
    - terminals:Copper Alloy  
Gold plated in contact area:  
OR Gold Plated overall
    - Shell:Steel&Copper Alloy  
Nickel/Tin Plated overall
  - ELECTRICAL CHARACTERISTICS:
    - Rating Current :1.5 Ampere
    - Rating Voltage :125 V Max
    - Contact Resistance:50 Milli ohms
    - Insulation Resistance:500 Mega ohms Min.
  - MECHANICAL CHARACTERISTICS:
    - Connector Mating force: 2.27kgf MAX
    - Durability:750Cycles.
  - ENVIRONMENT CHARACTERISTICS:
    - Operating temperature:-40℃ to +85℃
    - Storage temperature:-10℃ to +40℃

R5F0-11805-XXX0X7

G: 半金G/Pu”  
1: 吸塑盒  
2: PBT  
1: 黑色

TOLERANCE UNLESS OTHERWISE SPECIFIED		FLW 深圳市华联威电子科技有限公司			
.XXX ±0.10	.XX ±0.20	HUA LIAN WEI TECHNOLOGY ELECTRONICS CO;LTD.			
.X ±0.30	.X' ±3'				
	.XX' ±2'				
APPROVED		PART NAME:	RJ45 180度直插全包H款		
CHECKED		PART No:	R5F0-11805-G21017	C	
DRAWN	weihong	PROJECTION:	UNIT:	SCALE	SHEET
DATE	2022. 05. 31		mm	1:1	10F1
					REV. A1