
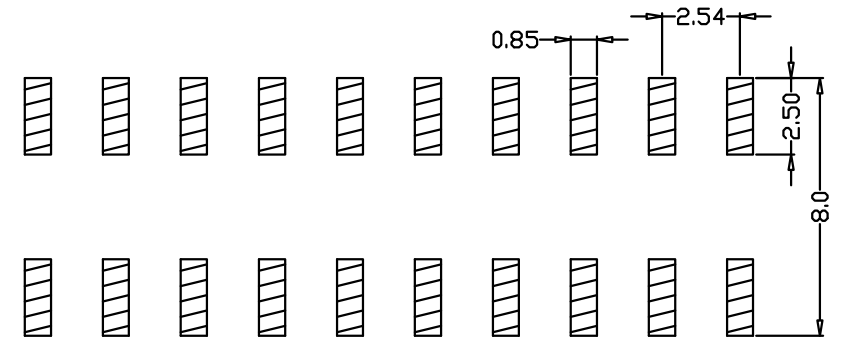
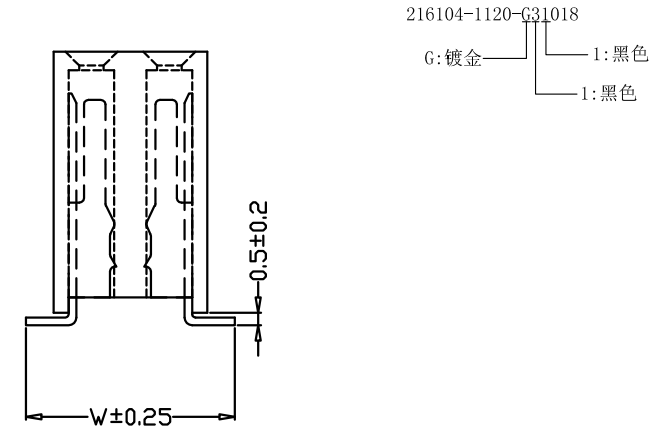
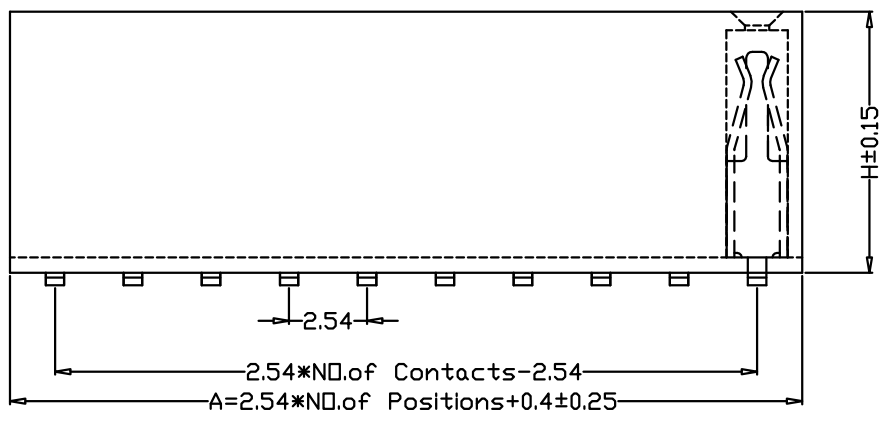


REV.	ECN.NO.	APPD.
A	/	ZFY

技术指标 (Technical Index) :

1. 工作温度 (Temperature range) : -25° C-85° C.
2. 额定电压 (Rated voltage) : 250V DC/AC (rms)
3. 额定电流 (Rated current) : 5A AC, DC
4. 接触阻抗 (CONTACT Resistance) : $\leq 25M\Omega$
5. 耐压值 (Withstanding voltage) : 1500V AC/minute
6. 绝缘阻抗 (Insulation resistance) $\geq 1000M\Omega$

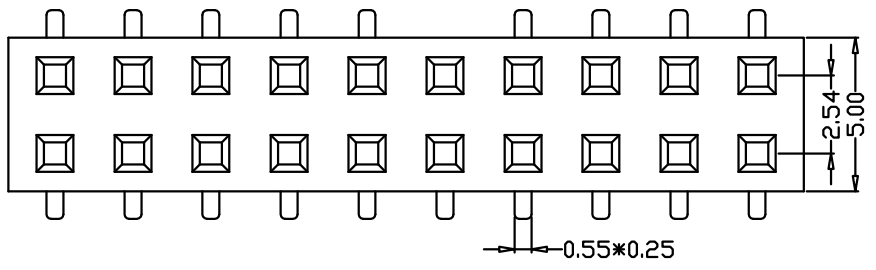

P. C. B LAYOUT

A	H	W	
2*2P-2*40P	7.1	8.5	6.8 7.1

TOLERANCE UNLESS OTHERWISE SPECIFIED		FLW 深圳市华联威电子科技有限公司			
.XXX ±0.15	.XX ±0.20	.X ±0.30	HUA LIAN WEI TECHNOLOGY ELECTRONICS CO;LTD.		
APPROVED		PART NAME: 2.54间距排母 H8.5 U型 双排 贴片30PIN			
CHECKED		PART No: 216104-1120-G31018		C	
DRAWN ZhangFenYan		PROJECTION:		UNIT:	SCALE
DATE 2018.10.10		mm		1:1	SHEET 10F1
		REV. A			