

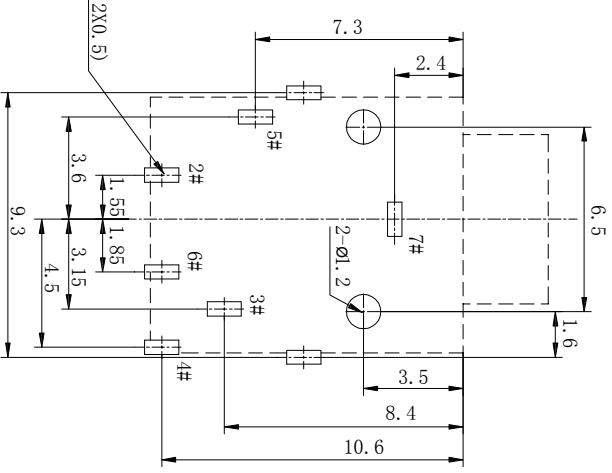
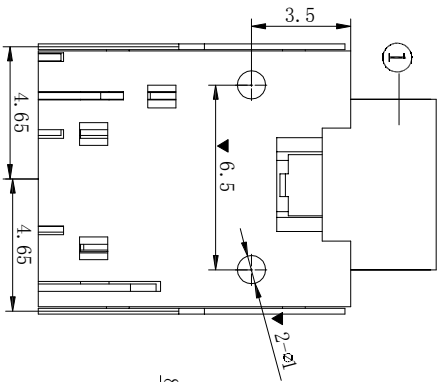
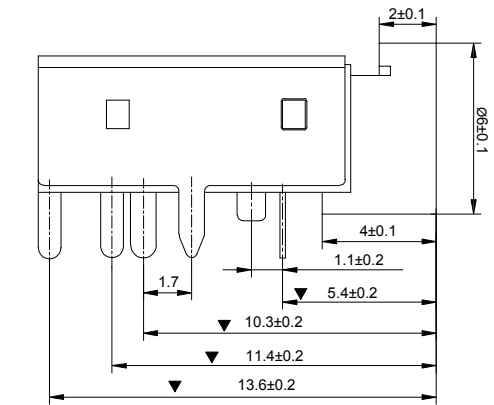
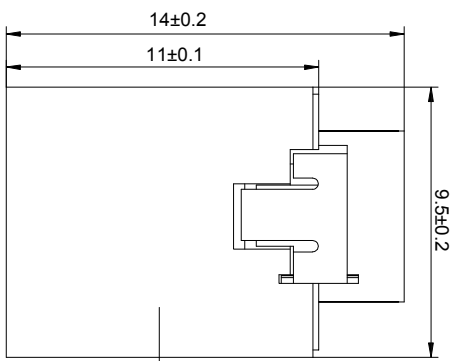
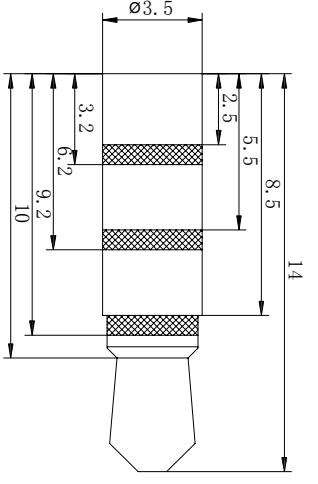
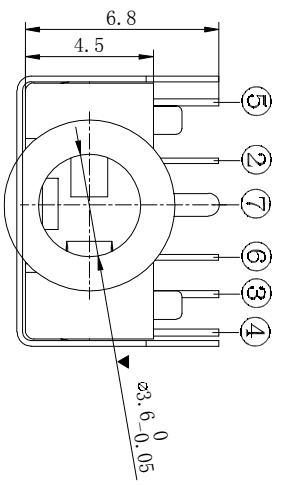


REV.	ECN. NO.	APPD.
A	/	/

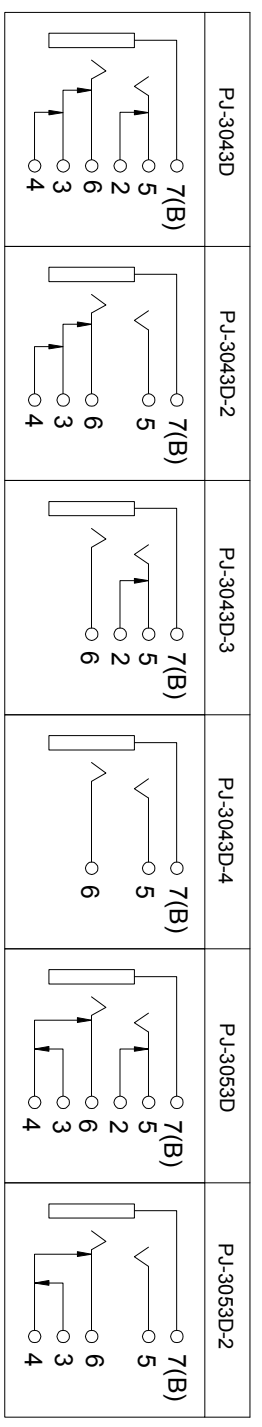

P.C.B LAYOUT TOP VIEW

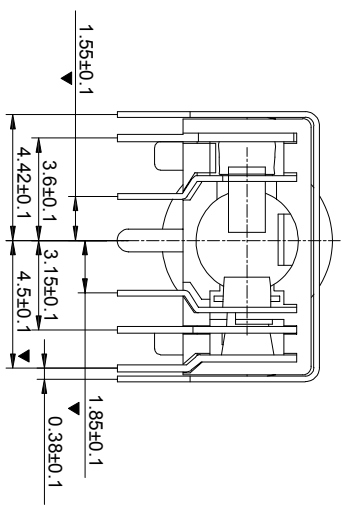


SCHEMATIC

JK1-179-XX18

主要技术性能	
额定电负荷	DC 30V/0.5A
接触电阻	≤0.03Ω
绝缘电阻	≥100MΩ
耐压	AC500V(50HZ)MIN
插拔力	3-20N
使用温度范围	-30~70°C
使用寿命	5000次

料号	料号	料号	料号	料号	料号	料号	料号	料号	料号	料号	料号
8	PJ-353D-08	外壳	1	磷铜	0.2T	镀镍	7	PJ-353D-07	7#	1	磷铜
7	PJ-353D-07	6#	1	磷铜	0.20T	镀银	6	PJ-353D-06	5#	1	磷铜
6	PJ-353D-06	5#	1	磷铜	0.2T	镀银	5	PJ-353D-05	4#	1	磷铜
5	PJ-353D-05	4#	1	磷铜	0.2T	镀银	4	PJ-353D-04	3#	1	磷铜
4	PJ-353D-04	3#	1	磷铜	0.20T	镀银	3	PJ-353D-03	2#	1	磷铜
3	PJ-353D-03	2#	1	磷铜	0.25T	镀银	2	PJ-353D-02	1#	1	磷铜
2	PJ-353D-02	1#	1	磷铜	0.25T	镀银	1	PJ-353D-01	基座	1	PA9T
1	PJ-353D-01	基座	1	PA9T		绿色					



HLW 深圳市华联威电子科技有限公司

HUA LIAN WEI TECHNOLOGY ELECTRONICS CO.,LTD.

TOLERANCE UNLESS OTHERWISE SPECIFIED		OTHERWISE SPECIFIED	
XXX	±0.10	X	±3
XX	±0.20	XX	±2
X	±0.30		

PART NAME: PJ-353-5P带壳3.5耳机插座

CHECKED: DATE: 2021.9.23

DRAWN: weihong

PROJECTION: UNIT: mm SCALE: 1:1 SHEET: 10F1 REV. C

