

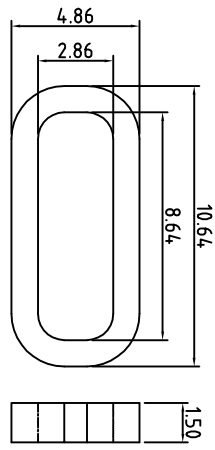
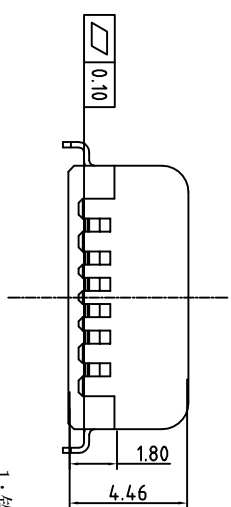

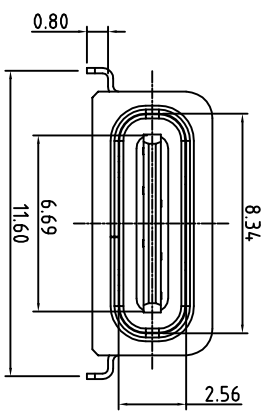
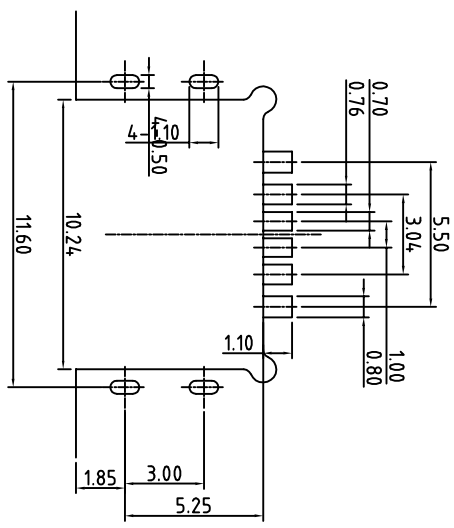



REV.	ECN.NO.	APPD.
A	EXXXXXXXXXX	yongguifeng

- SPECIFICATIONS:
1. ELECTRICAL CHARACTERISTICS:
- 1.1. RATING: 3A;
 - 1.2. CONTACT RESISTANCE: 30 mΩ MAX. (INITIAL);
 - 1.3. DIELECTRIC WITHSTANDING: 100V AC MIN.;
 - 1.4. INSULATION RESISTANCE: 100MΩ MIN.;
2. DURABILITY: 10,000 CYCLES MIN.;
3. INSERTION FORCE: 5-20N;
4. EXTRACTION FORCE: 6-20N;
5. WATER PROOFNESS: THIS PRODUCT IS BASED ON IPX6.
6. PLUG INTERFACE DIMENSIONS CONFORM TO USB2.0 SPEC.
7. PACKAGING: TAPE & REEL.



建议胶圈尺寸

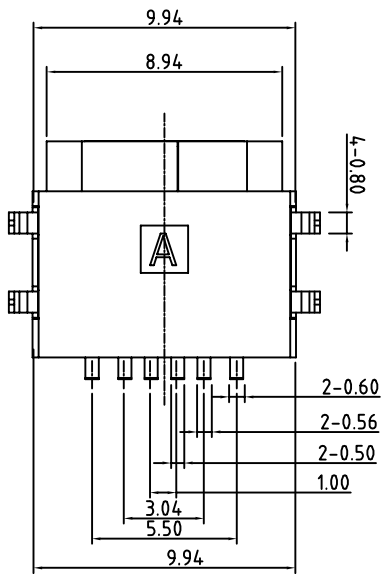

- U572-651X-XXXXX8
- 1: 铁壳镀镍
 - 5: 铜壳镀镍
 - B: 不锈钢镀镍
 - 1: 半金1u"
 - 3: 半金3u"
 - 5: 半金5u"
 - G: 半金G/Fu"
 - 9: 镀全金1u"
 - 4: 镀全亮锡
 - 1: PA66
 - 2: PBT
 - 10: PA10T
 - 1: 吸塑盒
 - 2: 吸塑管
 - 3: 载带
 - 6: 载带+贴麦拉
 - 1: 黑色
 - 2: 白色
 - 3: 米黄色

A5	CC1	B12	GND	3	Shell	1	SUS304R-1/2H Ni Plating=0.25mm	FINISH
A9	VBUS	B9	VBUS	2	Contact	6	Phosphor bronze C5191R-EH Au/Ni Plating =0.20mm	
A12	GND	B5	CC2	1	Housing	1	PA10T (G.F30%)	
PIN	SIGNAL NAME	PIN	SIGNAL NAME	ITEM	PART NAME	Q'TY		

TOLERANCE UNLESS OTHERWISE SPECIFIED		HUA LIAN WEI TECHNOLOGY ELECTRONICS CO.,LTD.	
XXX ±0.10	X' ±3	HW 深圳市华联威电子科技有限公司 HUA LIAN WEI TECHNOLOGY ELECTRONICS CO.,LTD.	
XX ±0.20	.XX ±2		
X ±0.30	.XX ±2		
APPROVED		PART NAME:	TYPE C 6P 沉板四脚插防水G级
CHECKED		PART No.:	U572-651B-G91018
DRAWN	yongguifeng	PROJECTION:	
DATE	2021.12.01	UNIT:	mm
		SCALE	1:1
		SHEET	1 OF 1
		REV.	A