


| ECN NO. | ECN DESCRIPTION | REV. | DATE | APPD. |
|---------|-----------------|------|------------|-------|
| / | / | A | 2015.06.19 | pcy |
| / | 新增电镀码说明 | B | 2017.07.11 | YS |

NOTES:

- MATERIL
- HOUSING:HI-TEMP PLASTIC (UL94-V-0),BLACK
- CONTACT:COPPER ALLOY(T=0.20),
PLATING:GOLD PLATED ON CONTACT AREA,
TIN PLATED ON SOLDER TAILS,UNDER
NICKEL PLATED.
- SHELL:BRASS(T=0.40),PLATING:NICKEL PLATED,
- SPRING SHELL: STAINLESS SUS304 T=0.20mm
- COVER: HI-TEMP,PLASTIC(UL94V-0)BLACK,
- SPECIFICATION:
- CURRENT RATING: 0.5 A
- CONTACT RESISTANCE: 30mΩ MAX.
- DIELECTRIC WITHSTANDING VOLTAGE: 500V AC
R.M.S FOR ONE MINUTE.
- INSULATION RESISTANCE: 100MΩ MIN AT 500V DC.
- OPERATING TEMPERATURE: -25° TO +85°.
- DURABILITY: 10000 CYCLES.
- MATING FORCE: 4.5KG MAX.
- UNMATING FORCE: 1.0KG MIN
- THE MARKED"★"IS IMPORTANT FOR QC TO CHECK

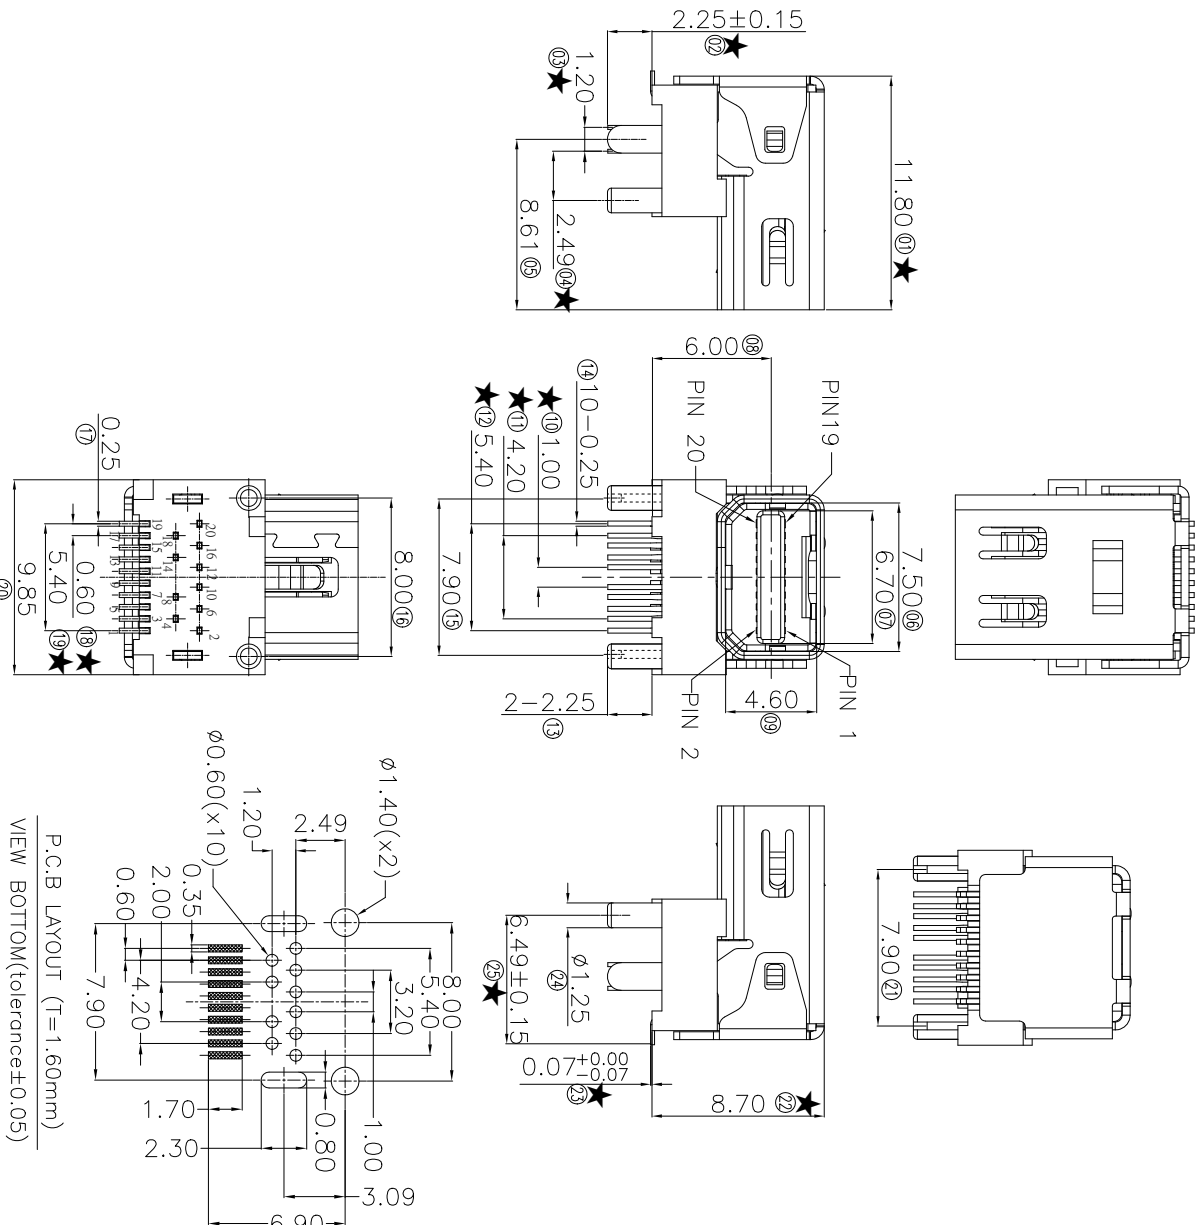

- DP23-011X-XXXXX
- 1: 铁壳镀镍
 - 5: 铜壳镀镍
 - B: 不锈钢镀镍
 - 8: 铜壳镀金
 - 1: RoHS 防火
 - R: RoHS 不防火
 - 1: 吸塑盒
 - 2: 载带
 - 8: 载带+贴麦拉
 - 9: 载带
 - 1: 黑色
 - 2: 白色
 - 3: 米黄色
 - 2: PBT
 - 6: LCP
 - 1: 半金1u"
 - 3: 半金3u"
 - 5: 半金5u"
 - 7: 半金10u"
 - 8: 半金15u"
 - A: 半金30u"

| TOLERANCE UNLESS OTHERWISE SPECIFIED | | HUA LIAN WEI TECHNOLOGY ELECTRONICS CO.,LTD | |
|--------------------------------------|---|--|-------------|
| .XXX ±0.10 | .X ±2' | HLW 深圳市华联威电子科技有限公司 HUA LIAN WEI TECHNOLOGY ELECTRONICS CO.,LTD | |
| .XX ±0.20 | .XX ±1' | | |
| .X ±0.30 | .XX ±1' | | |
| APPROVED | PART NAME: mini Displayport 母20PIN SMT式 无弹片 | | |
| CHECKED | PART No: DP23-011X-XXXX1 | | |
| DRAWN | UNIT: mm | SCALE: 1:1 | SHEET: REV. |
| DATE: 2015.06.19 | PROJECTION: | | 10F1 B |